




DIAMONDTRED

Anti-Slip safety insert with slip-resistance class R10/V6

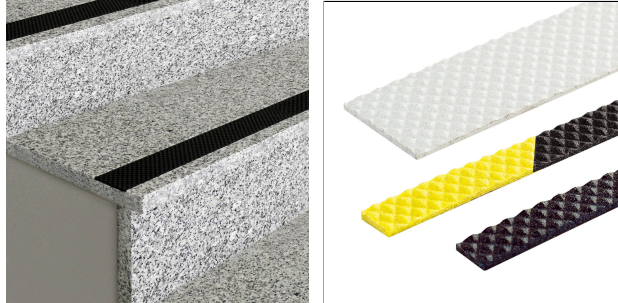

TECHNICAL DIMENSIONS AND PRODUCT VARIANTS

Material	[PVC]
Surface	[anti-slip]
Colour	safety white, neutral black, charcoal grey, light grey, rich brown, putty, mid grey, lumitred, chevron safety yellow
Length	250 cm, 2,500 cm
Width mm	13 mm, 37 mm, 43 mm
Strength mm	3 mm

PRODUCT VARIANTS

Ident	Surface	Colour	Length
TSI 107/13/250	anti-slip	charcoal grey	250 cm
TSI 107/37/250	anti-slip	charcoal grey	250 cm
TSI 107/43/250	anti-slip	charcoal grey	250 cm
TSI 107/13-25M	anti-slip	charcoal grey	2,500 cm
TSI 107/37-25M	anti-slip	charcoal grey	2,500 cm
TSI 107/43-25M	anti-slip	charcoal grey	2,500 cm
TSI 121/37/250	anti-slip	chevron safety yellow	250 cm
TSI 121/43/250	anti-slip	chevron safety yellow	250 cm
TSI 121/37-25M	anti-slip	chevron safety yellow	2,500 cm
TSI 121/43-25M	anti-slip	chevron safety yellow	2,500 cm
TSI 108/13/250	anti-slip	light grey	250 cm
TSI 108/37/250	anti-slip	light grey	250 cm
TSI 108/43/250	anti-slip	light grey	250 cm
TSI 108/13-25M	anti-slip	light grey	2,500 cm
TSI 108/37-25M	anti-slip	light grey	2,500 cm
TSI 108/43-25M	anti-slip	light grey	2,500 cm
TSI 120/13/250	anti-slip	lumitred	250 cm
TSI 120/37/250	anti-slip	lumitred	250 cm
TSI 120/43/250	anti-slip	lumitred	250 cm

Please note: For technical reasons, tolerances in color effects of the materials and print are possible. All information is based on the best of our knowledge and belief. No guarantee can be derived from this. We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.



TSI 120/13-25M	anti-slip	lumitred	2,500 cm
TSI 120/37-25M	anti-slip	lumitred	2,500 cm
TSI 120/43-25M	anti-slip	lumitred	2,500 cm
TSI 113/13/250	anti-slip	mid grey	250 cm
TSI 113/37/250	anti-slip	mid grey	250 cm
TSI 113/43/250	anti-slip	mid grey	250 cm
TSI 113/13-25M	anti-slip	mid grey	2,500 cm
TSI 113/37-25M	anti-slip	mid grey	2,500 cm
TSI 113/43-25M	anti-slip	mid grey	2,500 cm
TSI 106/13/250	anti-slip	neutral black	250 cm
TSI 106/37/250	anti-slip	neutral black	250 cm
TSI 106/43/250	anti-slip	neutral black	250 cm
TSI 106/13-25M	anti-slip	neutral black	2,500 cm
TSI 106/37-25M	anti-slip	neutral black	2,500 cm
TSI 106/43-25M	anti-slip	neutral black	2,500 cm
TSI 110/13/250	anti-slip	putty	250 cm
TSI 110/37/250	anti-slip	putty	250 cm
TSI 110/43/250	anti-slip	putty	250 cm
TSI 110/13-25M	anti-slip	putty	2,500 cm
TSI 110/37-25M	anti-slip	putty	2,500 cm
TSI 110/43-25M	anti-slip	putty	2,500 cm
TSI 109/13/250	anti-slip	rich brown	250 cm
TSI 109/37/250	anti-slip	rich brown	250 cm
TSI 109/43/250	anti-slip	rich brown	250 cm
TSI 109/13-25M	anti-slip	rich brown	2,500 cm
TSI 109/37-25M	anti-slip	rich brown	2,500 cm
TSI 109/43-25M	anti-slip	rich brown	2,500 cm
TSI 101/13/250	anti-slip	safety white	250 cm
TSI 101/37/250	anti-slip	safety white	250 cm
TSI 101/43/250	anti-slip	safety white	250 cm
TSI 101/13-25M	anti-slip	safety white	2,500 cm
TSI 101/37-25M	anti-slip	safety white	2,500 cm
TSI 101/43-25M	anti-slip	safety white	2,500 cm

Data sheet Accessories

DGUV test IFA 2404171: Slip resistance class R10, displacement space V6
 Resistant to sunlight, oils, fats, petrol, salts, acids, alkalis and cleaning agents
 For all steps in indoor and outdoor areas

PROPERTIES

Please note: For technical reasons, tolerances in color effects of the materials and print are possible.
 All information is based on the best of our knowledge and belief. No guarantee can be derived from this.
 We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.



DGUV test IFA 2404171: Slip resistance class R10, displacement space V6
Resistant to sunlight, oils, fats, petrol, salts, acids, alkalis and cleaning agents
For all steps in indoor and outdoor areas

PROCESSING

Easy to install thanks to self-adhesive backing. The adhesive surfaces must be cleaned and any contaminants such as release agents, preservatives, grease, oil, dust, water, old adhesives/sealants and other substances that could impair adhesion must be removed.

The generally accepted rules of technology and tiling must be observed. Suitability for use with mechanical and chemical resistance must always be checked in each individual case.

CARE

PVC does not require any special care. If necessary, it can be cleaned simply with clear, clean water and a few drops of washing-up liquid.

Please note: For technical reasons, tolerances in color effects of the materials and print are possible.
All information is based on the best of our knowledge and belief. No guarantee can be derived from this.
We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.