




TACMAT NM-F

Tactile warning mat for the easy creation of tactile stud fields in accordance with French standards NF P-351 and NF P-352

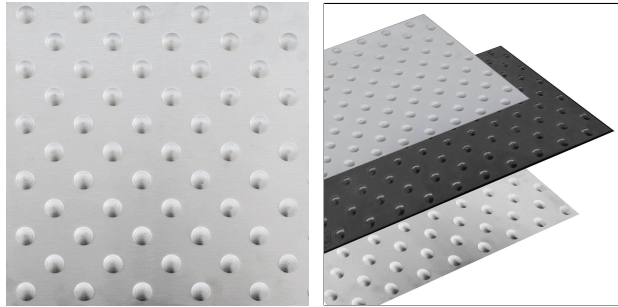

TECHNICAL DIMENSIONS AND PRODUCT VARIANTS

Material	[Rubber], [Stainless Steel (304)]
Colour	black, grey
Length	82.5 cm, 60 cm
Width mm	415 mm
dimension	600 x 415 mm, 825 x 415 mm

PRODUCT VARIANTS

Ident	Colour	Length
TTP 4283/33	black	82.5 cm
TTP 4283/33-SK	black	82.5 cm
TTP 4283/38	grey	82.5 cm
TTP 4283/38-SK	grey	82.5 cm
TTE 4260-SK		60 cm

Data sheet Accessories

Self adhesive or for adhesive fixing.

For indoor areas.

Rubber dimensions: 82.5 x 41.5 cm

Stud height: 5 mm

Stud diameter: 25 mm

Stud surface: smooth

Dimensions stainless steel: 60 x 41.5 cm

PROPERTIES

Self adhesive or for adhesive fixing.

For indoor areas.

Please note: For technical reasons, tolerances in color effects of the materials and print are possible. All information is based on the best of our knowledge and belief. No guarantee can be derived from this. We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.



Rubber dimensions: 82.5 x 41.5 cm
Stud height: 5 mm
Stud diameter: 25 mm
Stud surface: smooth
Dimensions stainless steel: 60 x 41.5 cm

MATERIAL

rubber

Stainless steel V2A/304 is particularly suitable for applications subject to high mechanical stress and for particularly high requirements in terms of cleanliness, hygiene and chemical resistance. Contact with products containing hydrochloric acid must be avoided.

No tools made of unalloyed steel may be used during processing. Open cut edges are not rust-resistant. If necessary, separate rust protection must be applied.

Even with stainless steel, flash rust may occur depending on the environmental conditions and should be removed immediately. The suitability of the material with regard to mechanical and chemical resistance must always be checked in individual cases. The suitability for use in terms of mechanical and chemical resistance must always be checked on a case-by-case basis.

PROCESSING

1. The substrate must be cleaned. Any contaminants such as release agents, preservatives, grease, oil, dust, water, old adhesives/sealants and other residues that could impair adhesion must be completely removed.
2. Mark the area where the mats are to be placed.
3. Apply MS polymer adhesive (e.g. Speed-Flex) to the back of the mat. For self-adhesive versions, remove the protective film from the back.
4. Stick the mat in the desired position.
5. Repeat steps 3 and 4 with additional mats until the entire surface has been covered.
6. At the end of the installation (or in between for large areas), carefully press down on the mats by walking over them.

The generally accepted rules of technology and tiling must be observed. Suitability for use with mechanical and chemical resistance must always be checked in each individual case.

CARE

Stainless steel (304) does not require any special maintenance. If necessary, it can be cleaned simply with clear, clean water and a few drops of washing-up liquid. Then wipe dry.

Avoid using acidic, alkaline and abrasive cleaning agents. Flash rust can be removed with commercially available polishes suitable for stainless steel.

Please note: For technical reasons, tolerances in color effects of the materials and print are possible.
All information is based on the best of our knowledge and belief. No guarantee can be derived from this.
We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.