




UNIFLOOR Standard Messing

Transition Profile Drilled/Undrilled

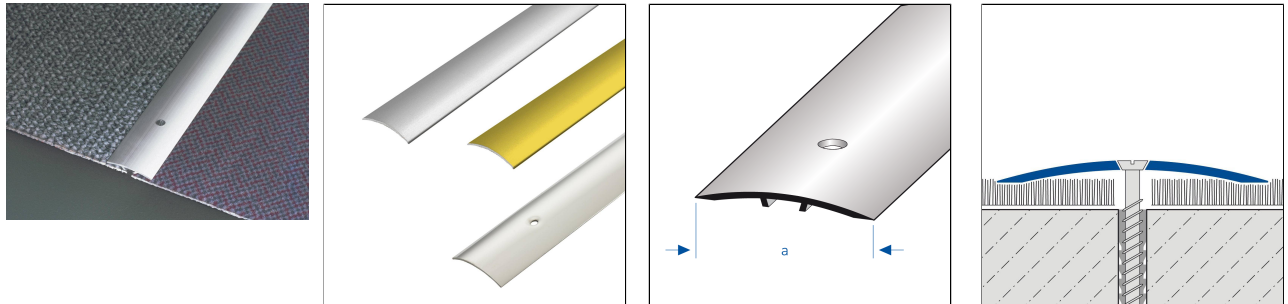

ACCESSORIES

Screws/dowels for fastening UNIFLOOR profiles in 270 cm length
 Dimensions: 3.0 x 25 mm
 For drill bits Ø 4.0 mm

PROPERTIES

For screwing, incl. fastening material for the 100 cm profiles
 Or self adhesive without visible fastening

MATERIAL

Aluminium can be used wherever medium mechanical stress is to be expected. Contact with alkaline materials (e.g. tile adhesive) can cause discolouration that is almost impossible to remove. High humidity can intensify this process. Dirt deposits can be removed with commercially available cleaning agents. Cleaning agents must be free of scouring powder or aggressive additives.

Stainless steel V2A/304 is particularly suitable for applications subject to high mechanical stress and for applications with particularly high requirements for cleanliness, hygiene and chemical resistance. Contact with products containing hydrochloric acid must be avoided.

No tools made of unalloyed steel may be used during processing. Open cut edges are not rust-resistant. If necessary, separate rust protection must be applied.

Even with stainless steel, flash rust may occur depending on the environmental conditions and should be removed immediately.

Brass is particularly suitable for indoor areas with medium mechanical stress. Brass oxidises (patinates) when exposed to air. When used in damp rooms or in conjunction with aggressive cleaning agents, this process can be intensified and stains may form. If necessary, polish with special cleaning pastes.

The suitability with regard to mechanical and chemical resistance must always be checked on a case-by-case basis.

CARE

Aluminium does not require any special care. If necessary, it can simply be cleaned with clear, clean water and a drop of washing-up liquid. Then wipe dry. Acidic, alkaline and abrasive cleaning agents should be avoided.

Please note: For technical reasons, tolerances in color effects of the materials and print are possible.
 All information is based on the best of our knowledge and belief. No guarantee can be derived from this.
 We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.



Stainless steel V2A/304 does not require any special care. If necessary, it can simply be cleaned with clear, clean water and a drop of washing-up liquid. Then wipe dry. Acidic, alkaline and abrasive cleaning agents should be avoided. Flash rust can be removed with commercially available polishes suitable for stainless steel.

Brass does not require any special care. If necessary, it can be cleaned with clear, clean water and a drop of household cleaner (dishwashing detergent, citric acid). Then wipe dry.

The patina that develops over time on untreated brass surfaces can be removed by polishing with a soft cloth and washing-up liquid or citric acid. Then wipe dry.

Do not use abrasive products.

PROCESSING

1. Cut the profiles to size. For non-self adhesive profiles, align the profile on the floor, mark it and mark the drill holes.
2. For non-self-adhesive profiles, drill holes at the marked points.
3. For non-self-adhesive profiles, fasten the profile to the drilled location using screws and dowels.
4. For self-adhesive profiles, the substrate must be cleaned and any contaminants such as release agents, preservatives, grease, oil, dust, water, old adhesives/sealants and other substances that impair adhesion must be removed.
5. For self-adhesive profiles, remove the protective film from the adhesive strip, align the profile and stick it to the desired location.

The generally accepted rules of technology and tiling must be observed. Suitability for use with mechanical and chemical resistance must always be checked in each individual case..

TECHNICAL DIMENSIONS AND PRODUCT VARIANTS

Material	[Brass], [Aluminium], [Stainless Steel (304)], [Stainless Steel (430)]
Surface	[high-gloss polished], [natural], [anodised]
Colour	natural, silver
Length	90 cm, 93 cm, 100 cm, 270 cm
sight width	30 mm, 40 mm
Width mm	30 mm, 40 mm

PRODUCT VARIANTS

Ident	Surface	Colour	Length
UFAE 3000/90	anodised	silver	90 cm
UFAE 3000-SK/90	anodised	silver	90 cm
UFAE 3000/93	anodised	silver	93 cm

Please note: For technical reasons, tolerances in color effects of the materials and print are possible. All information is based on the best of our knowledge and belief. No guarantee can be derived from this. We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.

UFAE 3000-SK/93	anodised	silver	93 cm
UFAE 3000/100	anodised	silver	100 cm
UFAE 3000-SK/100	anodised	silver	100 cm
UFAE 3000/270	anodised	silver	270 cm
UFAE 3000-SK/270	anodised	silver	270 cm
UFM 3000/90	high-gloss polished	natural	90 cm
UFM 3000-SK/90	high-gloss polished	natural	90 cm
UFM 4000/90	high-gloss polished	natural	90 cm
UFM 3000/93	high-gloss polished	natural	93 cm
UFM 3000-SK/93	high-gloss polished	natural	93 cm
UFM 4000/93	high-gloss polished	natural	93 cm
UFM 3000/100	high-gloss polished	natural	100 cm
UFM 3000-SK/100	high-gloss polished	natural	100 cm
UFM 4000/100	high-gloss polished	natural	100 cm
UFM 3000/270	high-gloss polished	natural	270 cm
UFM 3000-SK/270	high-gloss polished	natural	270 cm
UFM 4000/270	high-gloss polished	natural	270 cm
UFE 3000/90	natural	natural	90 cm
UFE 3000-SK/90	natural	natural	90 cm
UFE 4000/90	natural	natural	90 cm
UFE 3000/93	natural	natural	93 cm
UFE 3000-SK/93	natural	natural	93 cm
UFE 4000/93	natural	natural	93 cm
UFE 3000/100	natural	natural	100 cm
UFE 3000-SK/100	natural	natural	100 cm
UFE 4000/100	natural	natural	100 cm
UFE 3000/270	natural	natural	270 cm
UFE 3000-SK/270	natural	natural	270 cm
UFE 4000/270	natural	natural	270 cm

Please note: For technical reasons, tolerances in color effects of the materials and print are possible.
 All information is based on the best of our knowledge and belief. No guarantee can be derived from this.
 We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.