

7 7 Years
Product Warranty
UK Only

2 2 Years
On-Site Warranty
Main-land UK Only



Tatio

04063 KWWDL15-B30-WHT

Tatio Wall Washer Downlight 15w 16° 3000K

- High performance CREE COB LED
- Optional add-on emergency kits, available in manual and self-test
- Negligible UV, ideal for retail application



Overview

The Tatio LED Wall Washer

Downlight rotates through 350 degrees and has a 35 degree tilt.

Available in varies CCT and has a high CRI, suitable for retail display, showrooms, entertainment and

hospitality. Made from cast aluminium with a high-quality reflector the Kosnic Tatio delivers a highly efficient, high quality lighting



IP20



General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IP Rating	IP20
Protection Rating	Class II
Installation Area	Internal

Compliance

Others	UKCA, CE, RoHS, WEEE
--------	----------------------

Technical Summary

Product Code	KWWDL15-B30-WHT
Input Voltage Supply	220-240Vac 50/60Hz
Default Power	15 W
Driver Code/Part number	CYC015SNL035N
Driver Maximum Power (W)	15 W
Driver Output Current (mA)	350
Power Factor	0.95
Driver Power Factor	0.96
Default CCT	3,000 K
SDCM of CCT	<6
CRI	84
Dimmable	N
Lumens Output Maximum	1,250 lm
Maximum Efficiency	83 lm/W
Emergency Luminous Flux	220 lm
Nominal Lifetime (h)	50,000 h
Weight	0.43Kg
Dimensions (L x W x D) (mm)	82xØ105
Cut-Out (mm)	Ø90mm
Beam Angle - Lumi (°)	16

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Kosnic Lighting KosnicUK

KosnicLightingUK

7 7 Years
Product Warranty
UK Only

2 2 Years
On-Site Warranty
Main-land UK Only

Tatio



04063 KWWDL15-B30-WHT

Optional Gear

Product Code	Description	Type
EMPAD01	Neka Emergency Downlight kit 2.5W Manual test	Emergency Module

Overview

The Tatio LED Wall Washer

Downlight rotates through 350 degrees and has a 35 degree tilt.

Available in varies CCT and has a high CRI, suitable for retail display, showrooms, entertainment and hospitality. Made from cast aluminium with a high-quality reflector the Kosnic Tatio delivers a highly efficient, high quality lighting




IP20



General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IP Rating	IP20
Nominal Lifetime (h)	50,000 h
Protection Rating	Class II
Installation Area	Internal

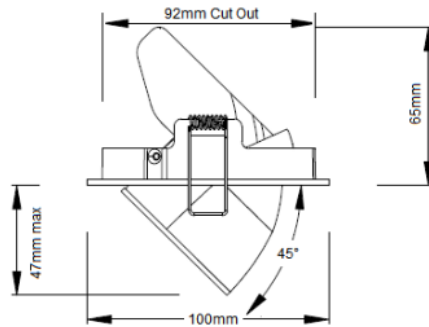

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

