5 Years
Product Warranty
UK Only

Vyne

Kosnic
LIGHTING • SIMPLY BETTER

05184 KIGL2GU10

Vyne, Inground uplight GU10, max 35W, Steel/Black base

- Stainless steel front bezel
- Static load >2000kg, suitable for vehicular and pedestrian traffic
- Powder coated die-cast aluminium body
- GU10 Lamp holder
- Pre-wired with 0.5 metre of rubber insulated cable
- Plastic housing is provided for easy installation



Overview

The Vyne LED recessed ground lights are made from die-cast aluminium and are supplied with a plastic housing for easy installation. IP67 rated ground lights and to 20,000N making them perfectly suited for commercial and domestic outdoor illumination of driveways, carparks and other outdoor spaces with vehicular access.

IP67

General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IP Rating	IP67
Protection Rating	Class I
Installation Area	External

Compliance

LVD	EN 60598-1:2024, EN 60598-2-1:2021
Others	UKCA, CE, RoHS, WEEE

Technical Summary	
Product Code	KIGL2GU10
Input Voltage Supply	220-240Vac 50/60Hz
Weight	0.57Kg
Dimensions (L x W x D) (mm)	120x∅100

Tel: 01635 523 713
Email: sales@kosnic.com
Kosnic.com
Kosnic Lighting KosnicUK KosnicLightingUK

5 Years
Product Warranty
UK Only


Vyne

Kosnic
LIGHTING • SIMPLY BETTER

05184 KIGL2GU10

Overview

The Vyne LED recessed ground lights are made from die-cast aluminium and are supplied with a plastic housing for easy installation. IP67 rated ground lights and to 20,000N making them perfectly suited for commercial and domestic outdoor illumination of driveways, carparks and other outdoor spaces with vehicular access.

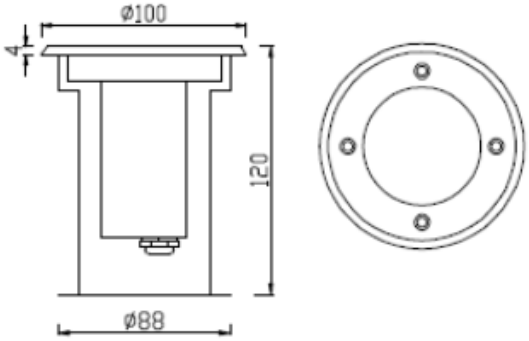

IP67

General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IP Rating	IP67
Protection Rating	Class I
Installation Area	External

Tel: 01635 523 713
Email: sales@kosnic.com
Kosnic.com
Kosnic Lighting KosnicUK KosnicLightingUK KosnicUK