

Ventas 2

05724 VEN20-SCT

Ventas 2 IP65 floodlight 20W CCT switch w/remote

- CCT switching with remote control included
- Surge protection
- Diecast aluminium body
- Slim profile
- 1m of H05RN-F 3 x 1mm² cable

Overview

Kosnic Ventas LED floodlights with PIR sensor option. Available in 10W, 20W, 30W and 50W with switchable CCT by remote control (included).

The high-quality aluminium floodlights make ideal replacements for energy-hungry halogen lighting and are suitable for outdoor use offering high lumen efficiency and a long life



IP65



General Information

| | |
|--------------------------------|---------------|
| Ambient Temperature Range (°C) | -20°C to 40°C |
| IK Rating | IK06 |
| IP Rating | IP65 |
| Protection Rating | Class I |
| Installation Area | External |
| L80B10 Lifetime (h) @Ta 25 °C | 36,000 h |

Compliance

| | |
|--------|---|
| LVD | EN 60598-1:2024, EN 60598-2-5:2015, EN 62031:2020, EN 62493:2015+A1:2022 |
| EMC | EN 55015:2019+A11:2020, EN 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN 61547:2023 |
| Others | UKCA, CE, RoHS, WEEE |

Technical Summary

| | |
|------------------------------------|---------------------|
| Product Code | VEN20-SCT |
| Input Voltage Supply | 220-240Vac 50/60Hz |
| Inrush Current (peak/duration) (A) | 0.12A/60µs |
| Default Power | 20 W |
| Power Factor | 0.99 |
| Settable Colour Temperatures | 3000K, 4000K, 6500K |
| CRI | ≥82 |
| Dimmable | Specific Dimmer |
| Lumens Output Maximum | 1,680 lm |
| Maximum Efficiency | 84 lm/W |
| L70B50 Lifetime (h) @ Ta 25 °C | 36,000 h |
| L80B10 Lifetime (h) @ Ta 25 °C | 36,000 h |
| L90B10 Lifetime (h) @ Ta 25 °C | 25,000 h |
| Nominal Lifetime (h) | 30,000 h |
| Glow wire temperature(°C) | 650 |
| Blue Light Hazard | RG1 |
| Weight | 0.46Kg |
| Dimensions (L x W x D) (mm) | 129x162x31 |
| Beam Angle - Lumi (°) | 105 |
| LS Energy Efficiency Class | F |

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Kosnic Lighting KosnicUK KosnicLightingUK

Ventas 2

05724 VEN20-SCT

Accessories

| Product Code | Description | Type |
|-----------------------------------|------------------------|---------------------------------|
| KCWP3IN | IP67 in-line connector | Connector kit |
| Settable (Default in Bold) | Variable | |
| CCT (K) | Rated Power (W) | Total Luminous Flux (lm) |
| 3000 | 20 | 1410 |
| 4000 | 20 | 1680 |
| 6500 | 20 | 1410 |

Overview

Kosnic Ventas LED floodlights with PIR sensor option. Available in 10W, 20W, 30W and 50W with switchable CCT by remote control (included).

The high-quality aluminium floodlights make ideal replacements for energy-hungry halogen lighting and are suitable for outdoor use offering high lumen efficiency and a long life





IP65




General Information


| | |
|--------------------------------|---------------|
| Ambient Temperature Range (°C) | -20°C to 40°C |
| IK Rating | IK06 |
| IP Rating | IP65 |
| Nominal Lifetime (h) | 30,000 h |
| Protection Rating | Class I |
| Installation Area | External |

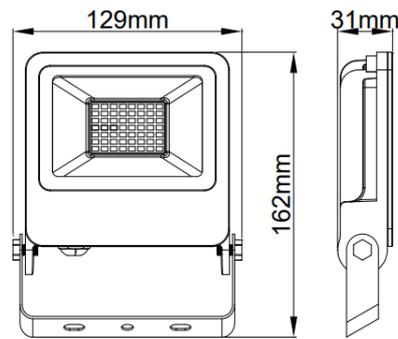


VEN10-SCT



VEN20-SCT



VEN30-SCT



VEN50-SCT

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

