


Ventas 2

05726 VEN30-SCT

Ventas 2 IP65 floodlight 30W CCT switch w/remote

- CCT switching with remote control included
- Surge protection
- Diecast aluminium body
- Slim profile
- 1m of H05RN-F 3 x 1mm² cable



Overview

Kosnic Ventas LED floodlights with PIR sensor option. Available in 10W, 20W, 30W and 50W with switchable CCT by remote control (included).

The high-quality aluminium floodlights make ideal replacements for energy-hungry halogen lighting and are suitable for outdoor use offering high lumen efficiency and a long life



General Information

Ambient Temperature Range (°C)	-20°C to 40°C
IK Rating	IK06
IP Rating	IP65
Protection Rating	Class I
Installation Area	External
L80B10 Lifetime (h) @Ta 25 °C	36,000 h

Compliance

LVD	EN 60598-1:2024, EN 60598-2-5:2015, EN 62031:2020, EN 62493:2015+A1:2022
EMC	EN 55015:2019+A11:2020, EN 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN 61547:2023
Others	UKCA, CE, RoHS, WEEE

Technical Summary

Product Code	VEN30-SCT
Input Voltage Supply	220-240Vac 50/60Hz
Inrush Current (peak/duration) (A)	0.18A/60µs
Default Power	30 W
Power Factor	0.99
Settable Colour Temperatures	3000K, 4000K, 6500K
CRI	≥82
Dimmable	Specific Dimmer
Lumens Output Maximum	2,800 lm
Maximum Efficiency	93 lm/W
L70B50 Lifetime (h) @ Ta 25 °C	36,000 h
L80B10 Lifetime (h) @ Ta 25 °C	36,000 h
L90B10 Lifetime (h) @ Ta 25 °C	25,000 h
Nominal Lifetime (h)	30,000 h
Glow wire temperature(°C)	650
Blue Light Hazard	RG1
Weight	0.65Kg
Dimensions (L x W x D) (mm)	163x197x34
Beam Angle - Lumi (°)	105
LS Energy Efficiency Class	F

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Ventas 2

05726 VEN30-SCT

Accessories

Product Code	Description	Type	
KCWP3IN	IP67 in-line connector	Connector kit	
Settable (Default in Bold)	Variable		
Rated Power (W)	CCT (K)	Total Luminous Flux (lm)	Light Source Supply
30	3000	2340	200Vdc 110mA
30	4000	2800	200Vdc 120mA
30	6500	2340	200Vdc 110mA

Overview

Kosnic Ventas LED floodlights with PIR sensor option. Available in 10W, 20W, 30W and 50W with switchable CCT by remote control (included).

The high-quality aluminium floodlights make ideal replacements for energy-hungry halogen lighting and are suitable for outdoor use offering high lumen efficiency and a long life





IP65




General Information


Ambient Temperature Range (°C)	-20°C to 40°C
IK Rating	IK06
IP Rating	IP65
Nominal Lifetime (h)	30,000 h
Protection Rating	Class I
Installation Area	External

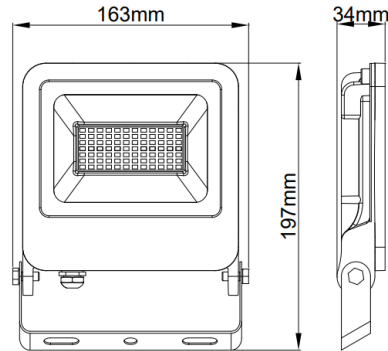


VEN10-SCT



VEN20-SCT



VEN30-SCT

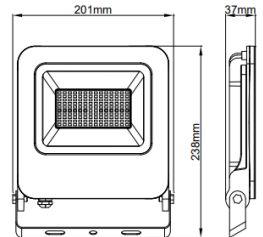

VEN50-SCT

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

