


Ventas 2

05727 VEN50-SCT

Ventas 2 IP65 floodlight 50W CCT switch w/remote

- CCT switching with remote control included
- Surge protection
- Diecast aluminium body
- Slim profile
- 1m of H05RN-F 3 x 1mm² cable

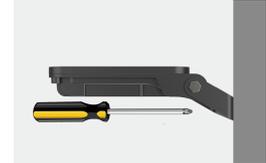

Overview

Kosnic Ventas LED floodlights with PIR sensor option. Available in 10W, 20W, 30W and 50W with switchable CCT by remote control (included).

The high-quality aluminium floodlights make ideal replacements for energy-hungry halogen lighting and are suitable for outdoor use offering high lumen efficiency and a long life



General Information

Ambient Temperature Range (°C)	-20°C to 40°C
IK Rating	IK06
IP Rating	IP65
Protection Rating	Class I
Installation Area	External
L80B10 Lifetime (h) @Ta 25 °C	36,000 h

Compliance

LVD	EN 60598-1:2024, EN 60598-2-5:2015, EN 62031:2020, EN 62493:2015+A1:2022
EMC	EN 55015:2019+A11:2020, EN 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN 61547:2023
Others	UKCA, CE, RoHS, WEEE

Technical Summary

Product Code	VEN50-SCT
Input Voltage Supply	220-240Vac 50/60Hz
Inrush Current (peak/duration) (A)	0.30A/60µs
Default Power	50 W
Power Factor	0.99
Settable Colour Temperatures	3000K, 4000K, 6500K
CRI	≥82
Dimmable	Specific Dimmer
Lumens Output Maximum	4,980 lm
Maximum Efficiency	100 lm/W
L70B50 Lifetime (h) @ Ta 25 °C	36,000 h
L80B10 Lifetime (h) @ Ta 25 °C	36,000 h
L90B10 Lifetime (h) @ Ta 25 °C	25,000 h
Nominal Lifetime (h)	30,000 h
Glow wire temperature(°C)	650
Blue Light Hazard	RG1
Weight	1.04Kg
Dimensions (L x W x D) (mm)	201x238x37
Beam Angle - Lumi (°)	105
LS Energy Efficiency Class	E

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Ventas 2

05727 VEN50-SCT

Accessories

Product Code	Description	Type	
KCWP3IN	IP67 in-line connector	Connector kit	
Settable (Default in Bold)	Variable		
CCT (K)	Rated Power (W)	Total Luminous Flux (lm)	Light Source Supply
3000	50	3980	200Vdc 180mA
4000	50	4980	200Vdc 200mA
6500	50	3980	200Vdc 180mA

Overview

Kosnic Ventas LED floodlights with PIR sensor option. Available in 10W, 20W, 30W and 50W with switchable CCT by remote control (included).

The high-quality aluminium floodlights make ideal replacements for energy-hungry halogen lighting and are suitable for outdoor use offering high lumen efficiency and a long life





IP65




General Information


Ambient Temperature Range (°C)	-20°C to 40°C
IK Rating	IK06
IP Rating	IP65
Nominal Lifetime (h)	30,000 h
Protection Rating	Class I
Installation Area	External

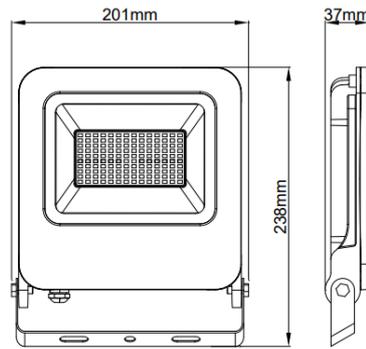


VEN10-SCT



VEN20-SCT



VEN30-SCT

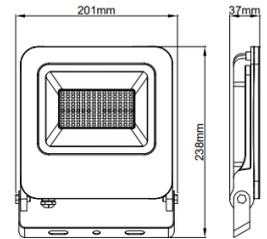

VEN50-SCT

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

