

# Mira

06192      MIR6FT60-W40

## Mira, Integrated batten, twin output, 60W 6ft, 4000K

- Retrofit replacement of traditional T8 single and twin battens
- Option of reflectors
- Option of integrated emergency version
- BESA box fitting points
- Slide & connect, designed for fast installation
- Optional plug-in PIR ON/OFF sensor compatible with Uni-Remote



### Overview

The Mira LED batten offers an output similar to traditional single or double output battens. The Mira utilises high performance LEDs to offer outstanding lumen efficiency. The battens are suitable for a wide range of applications including warehouses, factories and garages. The product range is also available with a built-in emergency module.



### General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK08
IP Rating	IP20
Protection Rating	Class I
Installation Area	Internal
L80B10 Lifetime (h) @Ta 25 °C	50,000 h

### Compliance

LVD	EN 60598-1:2024, EN 60598-2-1:2021, EN 60598-2-22:2022, EN 62471:2008, EN 62493:2015+A1:2022, EN 62560:2012+A11:2019
EMC	EN 55015:2019+A11:2020, EN 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN 61547:2023
Others	UKCA, CE, RoHS, WEEE

### Technical Summary

Product Code	MIR6FT60-W40
Input Voltage Supply	220-240Vac 50/60Hz
Inrush Current (peak/duration) (A)	111A/1.6µs
Default Power	60 W
Power Factor	>0.94
Default CCT	4,000 K
CRI	≥82
Dimmable	N
Lumens Output Maximum	7,200 lm
Maximum Efficiency	120 lm/W
L70B50 Lifetime (h) @Ta 25 °C	50,000 h
L80B10 Lifetime (h) @Ta 25 °C	50,000 h
L90B10 Lifetime (h) @Ta 25 °C	34,000 h
Nominal Lifetime (h)	50,000 h
Glow wire temperature(°C)	650
Blue Light Hazard	RG1
Weight	1.8Kg
Dimensions (L x W x D) (mm)	1789x62x62
Conduit Entry 20mm	Yes
LS Energy Efficiency Class	E

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Kosnic Lighting   KosnicUK   KosnicLightingUK

06192 MIR6FT60-W40

### Optional Gear

Product Code	Description	Type
BAT20LFP2-M2	LiFePO4 Battery 36.4V 2000mAh for Mira EME batten	Battery

### Accessories

Product Code	Description	Type
SUS02	Suspension kit 2 wires included, maximum 1.3m drop	Suspension Kit
KAS-GC6F	Guard cage for 6ft batten Mira & Kasai	Guard Cage
MIR-R6F	Reflector 6ft for Mira & Kasai	Reflector


### Overview

The Mira LED batten offers an output similar to traditional single or double output battens. The Mira utilises high performance LEDs to offer outstanding lumen efficiency. The battens are suitable for a wide range of applications including warehouses, factories and garages. The product range is also available with a built-in emergency module.





### General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK08
IP Rating	IP20
Nominal Lifetime (h)	50,000 h
Protection Rating	Class I
Installation Area	Internal



Product Code	Length(mm)	Width(mm)	Height(mm)	Fixing(mm)
MIR4FS20 MIR4FT30	1224	62	62	605
MIR5FS30 MIR5FT50	1525	62	62	605
MIR6FS40 MIR6FT60	1789	62	62	605

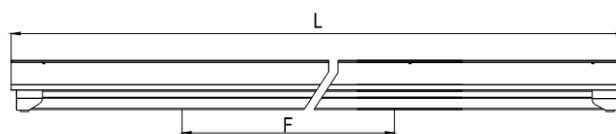

Product Code	Length(mm)	Width(mm)	Height(mm)	Fixing(mm)
MIR4FS20 MIR4FT30	1224	142	79	605
MIR5FS30 MIR5FT50	1525	142	79	605
MIR6FS40 MIR6FT60	1789	142	79	605

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

