

Tarkine

06569 TAR10W-GRY

Tarkine Aluminium diecast wall light 10W 4000K grey

- Die-cast aluminium body with polycarbonate diffuser
- Black or dark grey textured powder coat finishing
- Options of various heights



Overview

The Tarkine modern bollards with integrated LEDs are weather resistant and made from die-cast aluminium with a polycarbonate diffuser. Suited for commercial and domestic outdoor illumination of driveways, car parks and other outdoor areas. Available in black or grey with a choice of height.



IP65



General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK08
IP Rating	IP65
Protection Rating	Class I
Installation Area	External
L80B10 Lifetime (h) @Ta 25 °C	54,000 h

Compliance

LVD	EN 60598-1:2024, EN 60598-2-1:2021, EN 62493:2015+A1:2022
EMC	EN 55015:2019+A11:2020, EN 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN 61547:2023
Others	UKCA, CE, RoHS, WEEE

Technical Summary

Product Code	TAR10W-GRY
Input Voltage Supply	110-240Vac 50/60Hz
Inrush Current (peak/duration) (A)	39.8A/92.8µs
Default Power	10 W
Default CCT	4,000 K
CRI	≥82
Dimmable	N
Lumens Output Maximum	700 lm
Maximum Efficiency	35 lm/W
L70B50 Lifetime (h) @Ta 25 °C	54,000 h
L80B10 Lifetime (h) @Ta 25 °C	54,000 h
L90B10 Lifetime (h) @Ta 25 °C	27,000 h
Nominal Lifetime (h)	50,000 h
Glow wire temperature(°C)	650
Blue Light Hazard	RG1
Weight	1.3Kg
Dimensions (L x W x D) (mm)	220xØ220
LS Energy Efficiency Class	E

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com




Kosnic Lighting KosnicUK KosnicLightingUK

Tarkine

06569 TAR10W-GRY

Overview

The Tarkine modern bollards with integrated LEDs are weather resistant and made from die-cast aluminium with a polycarbonate diffuser. Suited for commercial and domestic outdoor illumination of driveways, car parks and other outdoor areas. Available in black or grey with a choice of height.

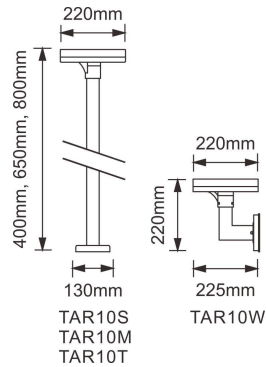

General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK08
IP Rating	IP65
Nominal Lifetime (h)	50,000 h
Protection Rating	Class I
Installation Area	External

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

