

**5** 5 Years  
Product Warranty  
UK Only


**2** 2 Years  
On-Site Warranty  
Main-land UK Only

# Viso 2

06604 VIS18-SCT

## Viso 2 LED Bulkhead 9W, 12W, 18W CCT switchable

- IP65 & vandal resistant (IK08)
- 20mm conduit entry and BESA box entry points
- Optional plug-in emergency modules, available in manual, self-test and DALI
- Switchable CCT (3000/4000/5000k)
- Optional plug-in microwave corridor sensor compatible with Uni-Remote
- Optional plug-in DALI conversion module
- Suitable for coastal installation

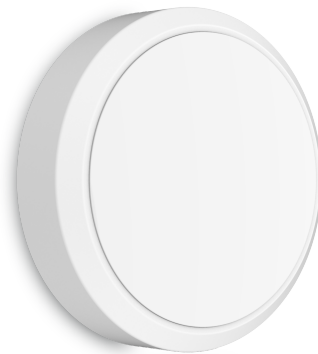

### Overview

The Viso IP65 LED bulkhead offers a low maintenance and robust solution to lighting in all areas where a practical lighting solution is required. The standard bulkhead can be used as a utility style bulkhead without a trim or can be enhanced with one of the two decorative trims to give a higher aesthetic appeal where required.



### General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK08
IP Rating	IP65
Protection Rating	Class II
Installation Area	Internal and External
L80B10 Lifetime (h) @Ta 25 °C	109,000 h

### Compliance

LVD	EN 60598-1:2024, EN 60598-2-1:2021
EMC	EN 55015:2019+A11:2020, EN 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN 61547:2023
Others	UKCA, CE, RoHS, WEEE

### Technical Summary

Product Code	VIS18-SCT
Input Voltage Supply	220-240Vac 50/60Hz
Inrush Current (peak/duration) (A)	6.4 A / 120 us
Settable Wattages	9W, 12W, 18W
Settable Colour Temperatures	3000K, 400K, 5000K
SDCM of CCT	<6
CRI	82
Dimmable	N
Flicker	<1%
Lumens Output Maximum	1,620 lm
Maximum Efficiency	95 lm/W
L70B50 Lifetime (h) @Ta 25 °C	173,000 h
L80B10 Lifetime (h) @Ta 25 °C	109,000 h
L90B10 Lifetime (h) @Ta 25 °C	52,000 h
Nominal Lifetime (h)	50,000 h
Glow wire temperature(°C)	650
Blue Light Hazard	RG1
Weight	0.64Kg
Dimensions (L x W x D) (mm)	73xØ260
BESA Entry	True
LS Energy Efficiency Class	D

Tel: 01635 523 713

Email: [sales@kosnic.com](mailto:sales@kosnic.com)

[Kosnic.com](http://Kosnic.com)



Kosnic Lighting KosnicUK KosnicLightingUK

**5** 5 Years  
Product Warranty  
UK Only

**2** 2 Years  
On-Site Warranty  
Main-land UK Only

# Viso 2



06604 VIS18-SCT

## Overview

The Viso IP65 LED bulkhead offers a low maintenance and robust solution to lighting in all areas where a practical lighting solution is required. The standard bulkhead can be used as a utility style bulkhead without a trim or can be enhanced with one of the two decorative trims to give a higher aesthetic appeal where required.



## General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK08
IP Rating	IP65
Nominal Lifetime (h)	50,000 h
Protection Rating	Class II
Installation Area	Internal and External


## Optional Gear

Product Code	Description	Type
EMDD02	2W standard emergency module for LED DD and bulkhead	Emergency Module
EMDD02/ST	2W self-test emergency module for LED DD and bulkhead	Self-test Emergency Module
RMW-DC	Plug in microwave motion and daylight sensor 12V DC	Microwave Sensor

## Accessories

Product Code	Description	Type
VIS18T-BLK	Viso 2 LED Bulkhead Trim Black	Trim
VIS18LID-BLK	Viso 2 LED Bulkhead Eyelid Trim Black	Trim
VIS18LID-WHT	Viso 2 LED Bulkhead Eyelid Trim White	Trim

RMT-UNI		Universal Remote Control for Kosnic motion sensors		Remote Control
Rated Power (W)	Current (mA)	CCT (k)	Total Lumen (lm)	Power factor
9	43	3000 warm white	830	0.92
9	43	4000 cool white	850	0.92
9	43	5000 day light	830	0.92
12	54	3000 warm white	1050	0.96
12	54	4000 cool white	1100	0.96
12	54	5000 day light	1050	0.96
18	81	3000 warm white	1520	0.97
18	81	4000 cool white	1620	0.97
18	81	5000 day light	1520	0.97

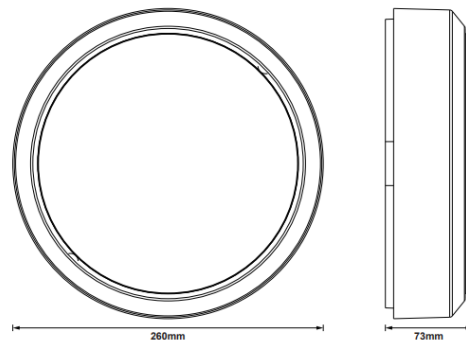

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Kosnic Lighting KosnicUK KosnicLightingUK KosnicUK