

5 5 Years
Product Warranty
UK Only



2 2 Years
On-Site Warranty
Main-land UK Only

Viso 2

06605 VIS12-SCT

Viso 2 LED Bulkhead 6W, 9W, 12W CCT switchable

- IP65 & vandal resistant (IK08)
- 20mm conduit entry and BESA box entry points
- Optional plug-in emergency modules, available in manual, self-test and DALI
- Switchable CCT (3000/4000/5000k)
- Optional plug-in microwave corridor sensor compatible with Uni-Remote
- Optional plug-in DALI conversion module
- Suitable for coastal installation

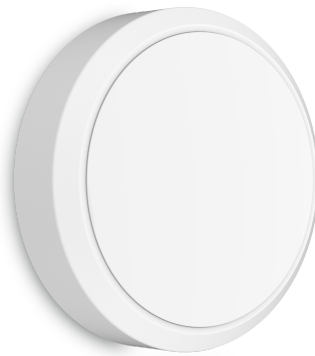

Overview

The Viso IP65 LED bulkhead offers a low maintenance and robust solution to lighting in all areas where a practical lighting solution is required. The standard bulkhead can be used as a utility style bulkhead without a trim or can be enhanced with one of the two decorative trims to give a higher aesthetic appeal where required.



General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK08
IP Rating	IP65
Protection Rating	Class II
Installation Area	Internal and External
L80B10 Lifetime (h) @Ta 25 °C	109,000 h

Compliance

LVD	EN 60598-1:2024, EN 60598-2-1:2021
EMC	EN 55015:2019+A11:2020, EN 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN 61547:2023
Others	UKCA, CE, RoHS, WEEE

Technical Summary

Product Code	VIS12-SCT
Input Voltage Supply	220-240Vac 50/60Hz
Inrush Current (peak/duration) (A)	5 A / 100 us
Settable Wattages	6W, 9W, 12W
Settable Colour Temperatures	3000K, 4000K, 5000K
SDCM of CCT	<6
CRI	82
Dimmable	N
Flicker	<1%
Lumens Output Maximum	910 lm
Maximum Efficiency	77 lm/W
L70B50 Lifetime (h) @Ta 25 °C	173,000 h
L80B10 Lifetime (h) @Ta 25 °C	109,000 h
L90B10 Lifetime (h) @Ta 25 °C	52,000 h
Nominal Lifetime (h)	50,000 h
Glow wire temperature(°C)	650
Blue Light Hazard	RG1
Weight	0.44Kg
Dimensions (L x W x D) (mm)	69xØ200
BESA Entry	True
LS Energy Efficiency Class	D

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Kosnic Lighting KosnicUK KosnicLightingUK

5 5 Years
Product Warranty
UK Only

2 2 Years
On-Site Warranty
Main-land UK Only

Viso 2



06605 VIS12-SCT

Optional Gear

Product Code	Description	Type
RMW-DC	Plug in microwave motion and daylight sensor 12V DC	Microwave Sensor

Accessories

Product Code	Description	Type
VIS12T-BLK	Viso 2 small LED Bulkhead Trim Black	Trim
VIS12LID-WHT	Viso 2 small LED Bulkhead Eyelid Trim White	Trim
VIS12LID-BLK	Viso 2 small LED Bulkhead Eyelid Trim Black	Trim

RMT-UNI		Universal Remote Control for Kosnic motion sensors			Remote Control
Rated Power (W)	Current (mA)	CCT (k)	Total Lumen (lm)	Power factor	
6	29	3000 warm white	450	0.9	
6	29	4000 cool white	460	0.9	
6	29	5000 day light	450	0.9	
9	42	3000 warm white	670	0.93	
9	42	4000 cool white	690	0.93	
9	42	5000 day light	670	0.93	
12	55	3000 warm white	880	0.95	
12	55	4000 cool white	910	0.95	
12	55	5000 day light	880	0.95	


Overview

The Viso IP65 LED bulkhead offers a low maintenance and robust solution to lighting in all areas where a practical lighting solution is required. The standard bulkhead can be used as a utility style bulkhead without a trim or can be enhanced with one of the two decorative trims to give a higher aesthetic appeal where required.



General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK08
IP Rating	IP65
Nominal Lifetime (h)	50,000 h
Protection Rating	Class II
Installation Area	Internal and External

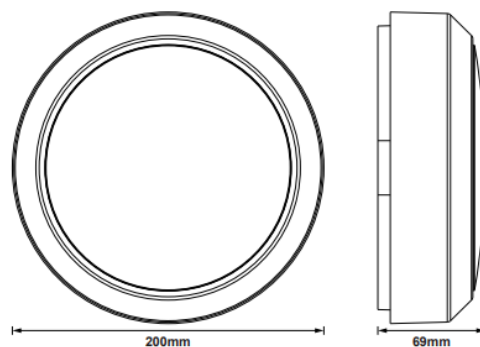

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Kosnic Lighting KosnicUK KosnicLightingUK KosnicUK