

Trent On-Site

06808 SIT2F20-W40/E

Trent On-Site 2ft 20W 110V LED worksite batten 4000K EME

- 100-120V input for work site application only
- Optional built in emergency module
- IP65 and vandal resistant (IK08)
- Optional metal stands available
- Suitable through wiring



Overview

The Kosnic Trent On-Site non-corrosive LED battens are for use on a 100-110V supply for worksite applications. The 4ft and 5ft versions are also available with a built-in emergency module. The two available stands include a 5 meter extension cable with a yellow CEE 3-pin plug and two 110V socket outlets.



IP65



General Information

Ambient Temperature Range (°C)	-10°C to 40°C
IK Rating	IK08
IP Rating	IP65
Protection Rating	Class I
Installation Area	Internal and External

Technical Summary

Product Code	SIT2F20-W40/E
Input Voltage Supply	100-120Vac 50/60Hz
Default Power	20 W
Power Factor	0.95
Default CCT	4,000 K
SDCM of CCT	<6
CRI	82
Dimmable	N
Flicker	35%
Lumens Output Maximum	1,800 lm
Maximum Efficiency	90 lm/W
Nominal Lifetime (h)	30,000 h
Weight	0.69Kg
Dimensions (L x W x D) (mm)	600x95x75

Compliance

LVD	EN 60598-1:2024, EN 60598-2-1:2021, EN 62493:2015+A1:2022
EMC	EN 55015:2019+A11:2020, EN 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN 61547:2023
Others	UKCA, CE, RoHS, WEEE

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Kosnic Lighting KosnicUK KosnicLightingUK

Trent On-Site

06808 SIT2F20-W40/E

Accessories

Product Code	Description	Type
SUS-BTN04	Suspension for Niva Kasai Kennet Milo Congo Trent Avon Indus, 4 wires included, max. 1m drop	Suspension Kit
SIT-CON	Trent On-Site waterproof connector	
SIT-FOL	Trent On-Site folding stand	
SIT-TRI	Trent On-Site tripod stand	

Overview

The Kosnic Trent On-Site non-corrosive LED battens are for use on a 100-110V supply for worksite applications. The 4ft and 5ft versions are also available with a built-in emergency module. The two available stands include a 5 meter extension cable with a yellow CEE 3-pin plug and two 110V socket outlets.





IP65



General Information

Ambient Temperature Range (°C)	-10°C to 40°C
IK Rating	IK08
IP Rating	IP65
Nominal Lifetime (h)	30,000 h
Protection Rating	Class I
Installation Area	Internal and External

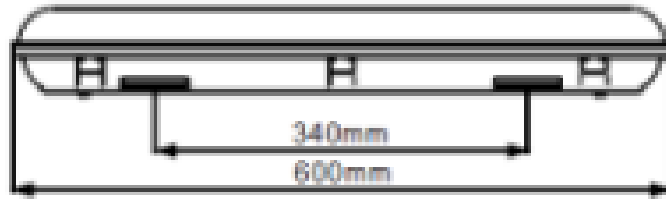

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

