5 Years
Product Warranty
UK Only


Ledge

Kosnic
LIGHTING • SIMPLY BETTER

06859 LDG10-GRY

Ledge brick light 10W 4000K grey

- Choice of mounting options
- Available in black and grey finishings
- Die-cast aluminium front plate
- Suitable for ground and wall mounting
- Downward illumination

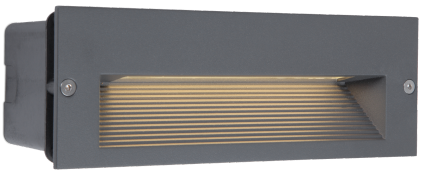

Overview

The Kosnic Ledge outdoor recessed brick light is suitable for ground or wall mounting. It offers high level of protection of IP65 and IK10. Ledge offers a simple decorative solution wherever outdoor recessed light is required.

IP65

General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK10
IP Rating	IP65
Materials	Housing diecast aluminium front plate, plastic back box, and glass
Protection Rating	Class I
Installation Area	Internal and External
L80B10 Lifetime (h) @Ta 25 °C	54,000 h

Compliance

LVD	EN 60598-1:2024, EN 60598-2-1:2021, EN 62493:2015+A1:2022
EMC	EN 55015:2019+A11:2020, EN 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN 61547:2023
Others	UKCA, CE, RoHS, WEEE

Technical Summary	
Product Code	LDG10-GRY
Input Voltage Supply	110-240Vac 50/60Hz
Inrush Current (peak/duration) (A)	70A/100µs
Default Power	10 W
Power Factor	0.90
Default CCT	4,000 K
SDCM of CCT	<6
CRI	≥82
Dimmable	N
Flicker	0.75%
Lumens Output Maximum	160 lm
Maximum Efficiency	16 lm/W
L70B50 Lifetime (h) @Ta 25 °C	54,000 h
L80B10 Lifetime (h) @Ta 25 °C	54,000 h
L90B10 Lifetime (h) @Ta 25 °C	27,000 h
Nominal Lifetime (h)	50,000 h
Glow wire temperature(°C)	650
Blue Light Hazard	RG1
Weight	0.59Kg
Dimensions (L x W x D) (mm)	210x75x83
Beam Angle - Lumi (°)	35
LS Energy Efficiency Class	E

Tel: 01635 523 713
Email: sales@kosnic.com
Kosnic.com
Kosnic Lighting KosnicUK KosnicLightingUK

5 Years
Product Warranty
UK Only


Ledge

Kosnic
LIGHTING • SIMPLY BETTER

06859 LDG10-GRY

Overview

The Kosnic Ledge outdoor recessed brick light is suitable for ground or wall mounting. It offers high level of protection of IP65 and IK10. Ledge offers a simple decorative solution wherever outdoor recessed light is required.

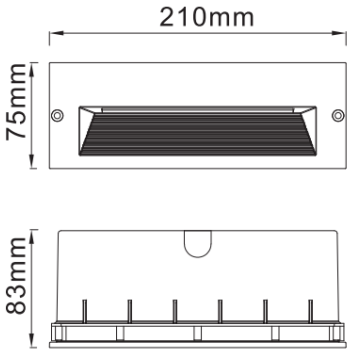

IP65

General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK10
IP Rating	IP65
Materials	Housing diecast aluminium front plate, plastic back box, and glass
Nominal Lifetime (h)	50,000 h
Protection Rating	Class I
Installation Area	Internal and External

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

Kosnic Lighting KosnicUK KosnicLightingUK KosnicUK