

# Pico

06991 PIC-26

## Pico-DD, LED bulkhead, 260mm for 9W 4-pin LED DD lamp

- Optional plug-in microwave corridor sensor compatible with Uni-Remote
- Optional plug-in DALI conversion module
- Optional plug-in emergency module, available in manual, self-test and DALI
- Twist & lock fast installation
- IP44



### Overview

The Pico bulkhead for DD lamps is IP44 rated when ceiling mounted and with high LOR. The medium and large sized can be easily converted for emergency use by installing the optional standard or self-test emergency modules. The small bulkhead is only suitable for Kosnic 9W LED DD lamps and cannot be converted for emergency use.



### General Information

Ambient Temperature Range (°C)	-20°C to 40°C
IP Rating	IP44
Protection Rating	Class I
Installation Area	Internal

### Technical Summary

Product Code	PIC-26
Input Voltage Supply	220-240Vac 50/60Hz
Dimensions (L x W x D) (mm)	92xØ260

### Compliance

LVD	EN 60598-1:2024, EN 60598-2-1:2021
Others	UKCA, CE, RoHS, WEEE

Tel: 01635 523 713

Email: [sales@kosnic.com](mailto:sales@kosnic.com)

[Kosnic.com](http://Kosnic.com)



# Pico

06991 PIC-26

## Optional Gear

Product Code	Description	Type
EMDD02/ST	2W self-test emergency module for LED DD and bulkhead	Self-test Emergency Module
EMDD02	2W standard emergency module for LED DD and bulkhead	Emergency Module
DD09/4P-SCT	LED DD Standard, 9W, 4pin, CCT	

## Accessories

Product Code	Description	Type
PICT-WHT	Pico & Pico-i, decorative trims, white	Trim
PICT-BAS	Pico & Pico-i, decorative trims, brass	Trim
PICT-SCH	Pico & Pico-i, decorative trims, satin chrome	Trim
PICT-CHM	Pico & Pico-i, decorative trims, chrome	Trim

## Overview

The Pico bulkhead for DD lamps is IP44 rated when ceiling mounted and with high LOR. The medium and large sized can be easily converted for emergency use by installing the optional standard or self-test emergency modules. The small bulkhead is only suitable for Kosnic 9W LED DD lamps and cannot be converted for emergency use.




**IP44**



## General Information

Ambient Temperature Range (°C)	-20°C to 40°C
IP Rating	IP44
Protection Rating	Class I
Installation Area	Internal

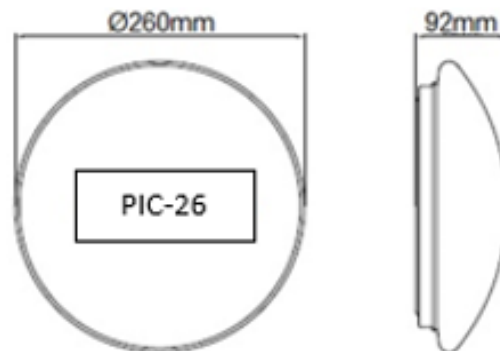

Tel: 01635 523 713

Email: [sales@kosnic.com](mailto:sales@kosnic.com)

[Kosnic.com](http://Kosnic.com)

