


Kasai

07010 KAS4FS

Kasai, T8 Batten fitting 4ft single without tube

- Optional reflector and guard cage
- Optional plug-in PIR ON/OFF sensor compatible with Uni-Remote
- BESA box fitting points
- Tubes not included

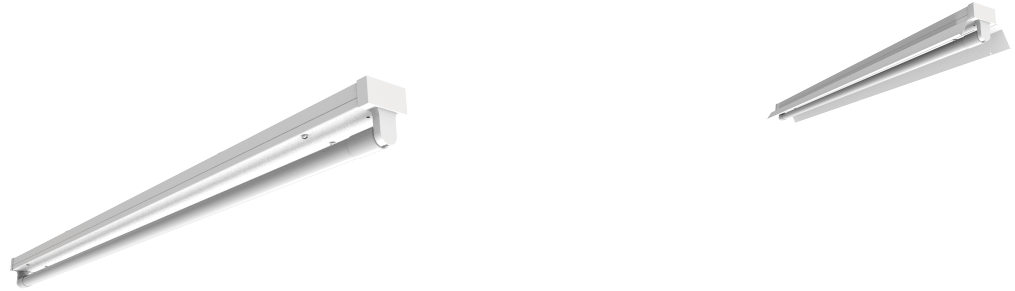

Overview

The Kosnic batten fitting for T8 LED tubes are pre-wired. Available in single or twin 4ft, 5ft and 6ft lengths. Available as standard unshaded fittings but additional reflectors to control the light distribution and protective guard cages may be ordered for the user to install.



General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IP Rating	IP20
Protection Rating	Class I
Installation Area	Internal

Technical Summary

Product Code	KAS4FS
Input Voltage Supply	220-240Vac 50/60Hz
Weight	1.11Kg
Dimensions (L x W x D) (mm)	1224x60x74
Conduit Entry 20mm	Yes

Compliance

LVD	EN 60598-1:2024, EN 60598-2-1:2021
Others	UKCA, CE, RoHS, WEEE

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



07010 KAS4FS

Accessories

Product Code	Description	Type
SUS-BTN04	Suspension for Niva Kasai Kennet Milo Congo Trent Avon Indus, 4 wires included, max. 1m drop	Suspension Kit
KAS-GC4F	Guard cage for 4ft batten Mira & Kasai	Guard Cage
MIR-R4F	Reflector 4ft for Mira & Kasai	Reflector
SUS-BTN04/25	Batten Suspension Kits 2.5m length, 4 wires included	Suspension Kit

Overview

The Kosnic batten fitting for T8 LED tubes are pre-wired. Available in single or twin 4ft, 5ft and 6ft lengths.

Available as standard unshaded fittings but additional reflectors to control the light distribution and protective guard cages may be ordered for the user to install.



IP20



General Information

Ambient Temperature Range (°C) -20°C to 50°C

IP Rating IP20


Protection Class I

Rating

Installation Area Internal



Dimensions without Reflector	Length (mm)	Width (mm)	Height (mm)	Fixing (mm)
KAS4FS	1224	60	74	605
KAS4FT	1224	88	69	605
KAS5FS	1525	60	74	605
KAS5FT	1525	88	69	605
KAS6FS	1789	60	74	605
KAS6FT	1789	88	69	605

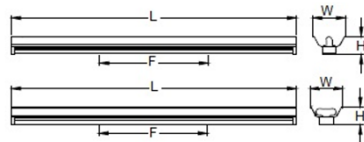

Dimensions Reflector	Length (mm)	Width (mm)	Height (mm)	Fixing (mm)
KAS4FS	1224	141	78	605
KAS4FT	1224	141	78	605
KAS5FS	1525	141	78	605
KAS5FT	1525	141	78	605
KAS6FS	1789	141	78	605
KAS6FT	1789	141	78	605

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

