


Kasai

07014 KAS6FS

Kasai, T8 Batten fitting 6ft single without tube

- Optional reflector and guard cage
- Optional plug-in PIR ON/OFF sensor compatible with Uni-Remote
- BESA box fitting points
- Tubes not included

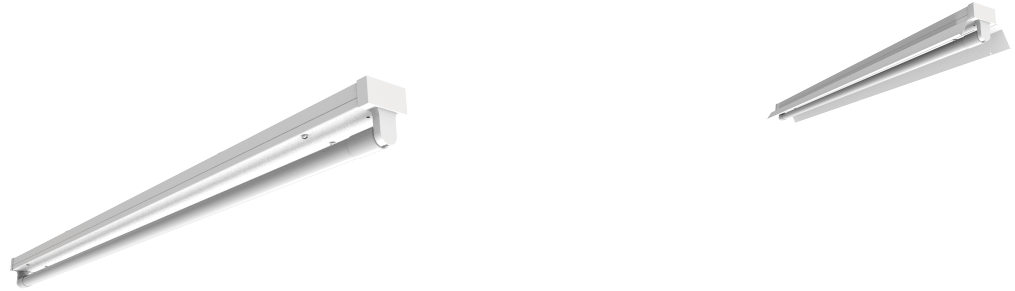

Overview

The Kosnic batten fitting for T8 LED tubes are pre-wired. Available in single or twin 4ft, 5ft and 6ft lengths. Available as standard unshaded fittings but additional reflectors to control the light distribution and protective guard cages may be ordered for the user to install.



IP20



General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IP Rating	IP20
Protection Rating	Class I
Installation Area	Internal

Technical Summary

Product Code	KAS6FS
Input Voltage Supply	220-240Vac 50/60Hz
Dimensions (L x W x D) (mm)	1789x60x74
Conduit Entry 20mm	Yes

Compliance

LVD	EN 60598-1:2024, EN 60598-2-1:2021
Others	UKCA, CE, RoHS, WEEE

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



07014 KAS6FS

Accessories

Product Code	Description	Type
SUS-BTN04	Suspension for Niva Kasai Kennet Milo Congo Trent Avon Indus, 4 wires included, max. 1m drop	Suspension Kit
KAS-GC6F	Guard cage for 6ft batten Mira & Kasai	Guard Cage
MIR-R6F	Reflector 6ft for Mira & Kasai	Reflector
SUS-BTN04/25	Batten Suspension Kits 2.5m length, 4 wires included	Suspension Kit


Overview

The Kosnic batten fitting for T8 LED tubes are pre-wired. Available in single or twin 4ft, 5ft and 6ft lengths. Available as standard unshaded fittings but additional reflectors to control the light distribution and protective guard cages may be ordered for the user to install.




General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IP Rating	IP20
Protection Rating	Class I
Installation Area	Internal

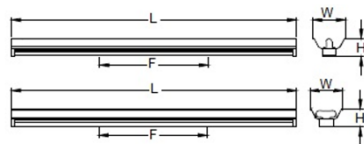

Dimensions Reflector	Length (mm)	Width (mm)	Height (mm)	Fixing (mm)
KAS4FS	1224	141	78	605
KAS4FT	1224	141	78	605
KAS5FS	1525	141	78	605
KAS5FT	1525	141	78	605
KAS6FS	1789	141	78	605
KAS6FT	1789	141	78	605

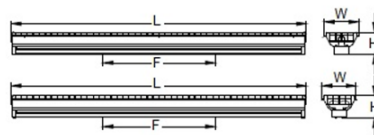

Dimensions with Reflector and Guard Cage	Length (mm)	Width (mm)	Height (mm)	Fixing (mm)
KAS4FS	1232	141	93	605
KAS4FT	1232	141	93	605
KAS5FS	1532	141	93	605
KAS5FT	1532	141	93	605
KAS6FS	1796	141	93	605
KAS6FT	1796	141	93	605

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

