

**7** 7 Years  
Product Warranty  
UK Only

**2** 2 Years  
On-Site Warranty  
Main-land UK Only




# Slim Line

07019 SLM4F30

## Slim-Line, LED Batten, 30W, 4ft, SCT 3000K/4000K/6000K

- Switchable CCT (3000K/4000K/6000K)
- Slim profile
- High efficiency of 120 lm/W
- Simple external bracket mounting
- Long operational life of 40,000 h
- Flicker free



## Overview

The Slim-Line LED Integrated Battens have a slim profile and integrated LED drivers. Available with a switchable CCT from a simple elegant design helping to reduce building energy and maintenance costs. The range of products is suitable for interior use in open plan offices, classrooms, corridors and retail premises.



IP20



## General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK06
IP Rating	IP20
Protection Rating	Class I
Installation Area	Internal
L80B10 Lifetime (h) @Ta 25 °C	50,000 h

## Compliance

LVD	EN 60598-1:2024, EN 60598-2-1:2021, EN 62493:2015+A1:2022
EMC	EN 55015:2019+A11:2020, EN 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN 61547:2023
Others	UKCA, CE, RoHS, WEEE

## Technical Summary

Product Code	SLM4F30
Input Voltage Supply	220-240Vac 50/60Hz
Inrush Current (peak/duration) (A)	40.8A/200us
Default Power	30 W
Power Factor	0.96
Settable Colour Temperatures	3000K, 4000K, 6000K
SDCM of CCT	<6
CRI	82
Dimmable	N
Flicker	<1%
Lumens Output Maximum	3,800 lm
Maximum Efficiency	127 lm/W
L70B50 Lifetime (h) @Ta 25 °C	50,000 h
L80B10 Lifetime (h) @Ta 25 °C	50,000 h
L90B10 Lifetime (h) @Ta 25 °C	34,000 h
Nominal Lifetime (h)	50,000 h
Glow wire temperature(°C)	650
Blue Light Hazard	RG1
Weight	1.12Kg
Dimensions (L x W x D) (mm)	1200x124x42
LS Energy Efficiency Class	D

Tel: 01635 523 713

Email: [sales@kosnic.com](mailto:sales@kosnic.com)

[Kosnic.com](http://Kosnic.com)



Kosnic Lighting KosnicUK

KosnicLightingUK

**7** 7 Years  
Product Warranty  
UK Only

**2** 2 Years  
On-Site Warranty  
Main-land UK Only

# Slim Line



07019 SLM4F30

## Accessories

Product Code	Description	Type
SUS04	LED Panel & Slim Line 2 suspension kit (4 cables per bag)	Suspension Kit
SUS04/25	Suspension kit 2.5m Alden & Nevis & Slim Line 2 (4 cables per bag)	Suspension Kit

CCT (k)	Total Luminous Flux (lm)	Chromaticity (x)	Chromaticity (y)	R9 CRI
3000	3600	0.440	0.400	4
4000	3800	0.370	0.360	20
6000	3800	0.320	0.330	10

## Overview

The Slim-Line LED Integrated Battens have a slim profile and integrated LED drivers. Available with a switchable CCT from a simple elegant design helping to reduce building energy and maintenance costs. The range of products is suitable for interior use in open plan offices, classrooms, corridors and retail premises.




**IP20**



## General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK06
IP Rating	IP20
Nominal Lifetime (h)	50,000 h
Protection Rating	Class I
Installation Area	Internal

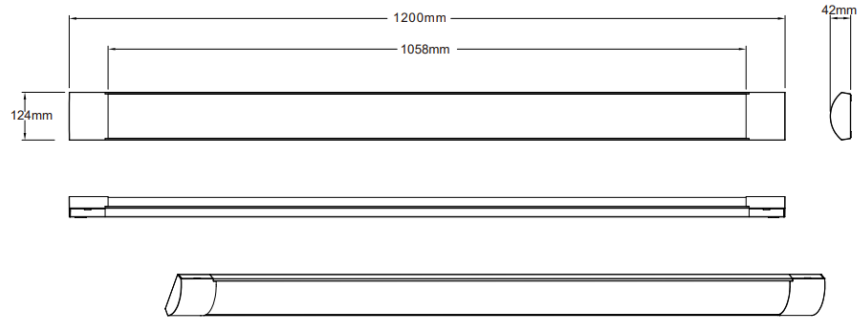

Tel: 01635 523 713

Email: [sales@kosnic.com](mailto:sales@kosnic.com)

[Kosnic.com](http://Kosnic.com)

