

Indus

07024 IDU4FS

Indus, Non-corrosive Batten for 1x4ft LED T8, without tubes

- IP65 and vandal resistant (IK08)
- 20mm Conduit entry
- Use with LED T8 only



Overview

The Indus IP65 Battens for T8 LED Tubes are designed specifically for use with Kosnic's T8 LED Tubes. Suitable for a wide range of indoor and outdoor commercial applications including warehouses, factories and garages. Available in varies length and with built-in emergency modules option.



IP65



General Information

| | |
|--------------------------------|-----------------------|
| Ambient Temperature Range (°C) | -20°C to 50°C |
| IK Rating | IK08 |
| IP Rating | IP65 |
| Protection Rating | Class I |
| Installation Area | Internal and External |

Compliance

| | |
|--------|------------------------------------|
| LVD | EN 60598-1:2024, EN 60598-2-1:2021 |
| Others | UKCA, CE, RoHS, WEEE |

Technical Summary

| | |
|-----------------------------|--------------------|
| Product Code | IDU4FS |
| Input Voltage Supply | 220-240Vac 50/60Hz |
| Weight | 1.45Kg |
| Dimensions (L x W x D) (mm) | 1265x86x90 |
| Conduit Entry 20mm | Yes |

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



07024 IDU4FS

Optional Gear

| Product Code | Description | Type |
|--------------|---|------------|
| PIR-SID | P30 Exterior PIR Sensor Side-Mount with RMT-UNI control | PIR Sensor |

Accessories

| Product Code | Description | Type |
|--------------|--|----------------|
| SUS-BTN04 | Suspension for Niva Kasai Kennet Milo Congo Trent Avon Indus, 4 wires included, max. 1m drop | Suspension Kit |
| SUS-BTN04/25 | Batten Suspension Kits 2.5m length, 4 wires included | Suspension Kit |


Overview

The Indus IP65 Batters for T8 LED Tubes are designed specifically for use with Kosnic's T8 LED Tubes. Suitable for a wide range of indoor and outdoor commercial applications including warehouses, factories and garages. Available in varies length and with built-in emergency modules option.



General Information

| | |
|--------------------------------|-----------------------|
| Ambient Temperature Range (°C) | -20°C to 50°C |
| IK Rating | IK08 |
| IP Rating | IP65 |
| Protection Rating | Class I |
| Installation Area | Internal and External |

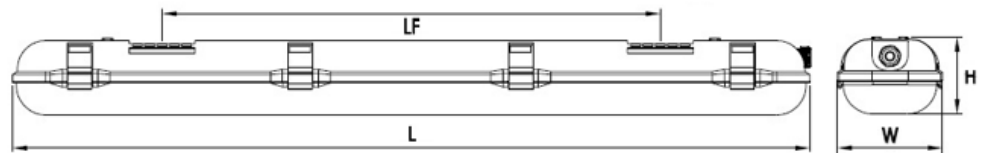

| | L | W | H | LF |
|--------|------|-----|----|------|
| IDU4FS | 1265 | 86 | 90 | 900 |
| IDU4FT | 1265 | 124 | 90 | 900 |
| IDU5FS | 1565 | 86 | 90 | 1000 |
| IDU5FT | 1565 | 124 | 90 | 1000 |

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

