

Indus

07026 IDU4FT

Indus, Non-corrosive Batten for 2x4ft LED T8, without tubes

- IP65 and vandal resistant (IK08)
- 20mm Conduit entry
- Use with LED T8 only



Overview

The Indus IP65 Battens for T8 LED Tubes are designed specifically for use with Kosnic's T8 LED Tubes. Suitable for a wide range of indoor and outdoor commercial applications including warehouses, factories and garages. Available in varies length and with built-in emergency modules option.



IP65



General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK08
IP Rating	IP65
Protection Rating	Class I
Installation Area	Internal and External

Compliance

LVD	EN 60598-1:2024, EN 60598-2-1:2021
Others	UKCA, CE, RoHS, WEEE

Technical Summary

Product Code	IDU4FT
Input Voltage Supply	220-240Vac 50/60Hz
Weight	2.05Kg
Dimensions (L x W x D) (mm)	1265x124x90
Conduit Entry 20mm	Yes

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



07026 IDU4FT

Optional Gear

Product Code	Description	Type
PIR-SID	P30 Exterior PIR Sensor Side-Mount with RMT-UNI control	PIR Sensor

Accessories

Product Code	Description	Type
SUS-BTN04	Suspension for Niva Kasai Kennet Milo Congo Trent Avon Indus, 4 wires included, max. 1m drop	Suspension Kit
SUS-BTN04/25	Batten Suspension Kits 2.5m length, 4 wires included	Suspension Kit


Overview

The Indus IP65 Battens for T8 LED Tubes are designed specifically for use with Kosnic's T8 LED Tubes. Suitable for a wide range of indoor and outdoor commercial applications including warehouses, factories and garages. Available in varies length and with built-in emergency modules option.



General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK08
IP Rating	IP65
Protection Rating	Class I
Installation Area	Internal and External

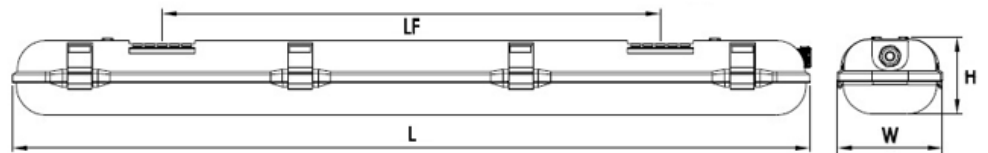

	L	W	H	LF
IDU4FS	1265	86	90	900
IDU4FT	1265	124	90	900
IDU5FS	1565	86	90	1000
IDU5FT	1565	124	90	1000

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

