

7 7 Years
Product Warranty
UK Only

2 2 Years
On-Site Warranty
Main-land UK Only

Volga

07037 VLG4F33-W40

Volga, agriculture non-corrosive, 4ft 33W 4000K

- Ammonia-resistant PMMA body for livestock lighting
- Stainless end cap
- Cable gland with wiring terminals on either end of luminaire
- Popular cylinder body
- Flicker free
- High efficiency of up to 133lm/W



Overview

The Volga is a tough waterproof IP69K batten for harsh environments. Using high lumen SMD chips and a high transmittance PMMA cover to give a uniform output. Connections at both ends for linkage and clip-on bracket for easy installation. Suitable in farms, factories, warehouses and other areas with high humidity and dust.



General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK06
IP Rating	IP69K
Protection Rating	Class II
Installation Area	Internal and External

Compliance

Others UKCA, CE, RoHS, WEEE

Technical Summary

Product Code	VLG4F33-W40
Input Voltage Supply	220-240Vac 50/60Hz
Inrush Current (peak/duration) (A)	96A/1.3us
Default Power	33 W
Power Factor	0.97
Default CCT	4,000 K
SDCM of CCT	<6
CRI	>80
Dimmable	N
Flicker	0%
Lumens Output Maximum	4,150 lm
Maximum Efficiency	126 lm/W
Nominal Lifetime (h)	50,000 h
Weight	1.65Kg
Dimensions (L x W x D) (mm)	1200xØ75

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Kosnic Lighting KosnicUK KosnicLightingUK

7 7 Years
Product Warranty
UK Only

2 2 Years
On-Site Warranty
Main-land UK Only

Volga

07037 VLG4F33-W40

Accessories

Product Code	Description	Type
SUS02	Suspension kit 2 wires included, maximum 1.3m drop	Suspension Kit


Overview

The Volga is a tough waterproof IP69K batten for harsh environments. Using high lumen SMD chips and a high transmittance PMMA cover to give a uniform output. Connections at both ends for linkage and clip-on bracket for easy installation. Suitable in farms, factories, warehouses and other areas with high humidity and dust.



General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK06
IP Rating	IP69K
Nominal Lifetime (h)	50,000 h
Protection Rating	Class II
Installation Area	Internal and External

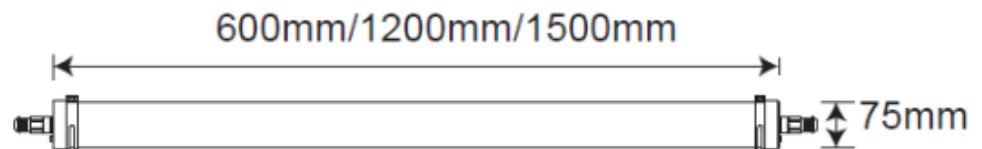

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Kosnic Lighting KosnicUK KosnicLightingUK KosnicUK