

5 Years
Product Warranty
UK Only

2 Years
On-Site Warranty
Main-land UK Only

Faceta



07072 FAC6IN20-SCT

Faceta 6 inch 16/20W Downlight CCT switchable

- IP65 when ceiling recess mounted
- Optional drop-down diffusers for KCDL2622FR65
- Unique faceted white reflector
- Low glare
- Flicker free
- Optional DALI, 1-10V (0-10V) driver (FAC8IN26-SCT)
- Option of CCT switching 3000K, 4000K, 5000K



Overview

The Faceta LED Commercial

Downlight range are retrofit LED

lighting for widely used 3", 4", 6" and

8" fluorescent downlights with a

distinctive faceted white reflector

and a recessed light source.

Available with a switchable CCT and

the downlights are compatible with

Kosnic's emergency module.



IP65



General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IP Rating	IP65
Protection Rating	Class III
Installation Area	Internal

Compliance

LVD	EN 60598-1:2024, EN 60598-2-1:2021, EN 62031:2020, EN 62493:2015+A1:2022
EMC	EN 55015:2019+A11:2020, EN 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN 61547:2023
Others	UKCA, CE, RoHS, WEEE

Technical Summary

Product Code	FAC6IN20-SCT
Input Voltage Supply	220-240Vac 50/60Hz
Settable Wattages	16W, 20W
Driver Code/Part number	CYC030SNL60-70N (DR25C4759)
Driver Maximum Power (W)	30
Driver Output Current (mA)	600/700
Power Factor	>90
Driver Power Factor	>90
Settable Colour Temperatures	3000K, 4000K, 5000K
SDCM of CCT	<6
CRI	>80
Dimmable	Specific Dimmer
Lumens Output Maximum	1,380 lm
Maximum Efficiency	69 lm/W
Maintained Luminous Flux	300 lm
Nominal Lifetime (h)	50,000 h
Weight	0.6Kg
Dimensions (L x W x D) (mm)	88xØ202
Cut-Out (mm)	Ø164mm
Beam Angle - Lumi (°)	80

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Kosnic Lighting KosnicUK

KosnicLightingUK

5 5 Years
Product Warranty
UK Only

2 2 Years
On-Site Warranty
Main-land UK Only

Faceta

Kosnic

07072 FAC6IN20-SCT

Optional Gear

Product Code	Description	Type
UEM03/ST	Universal Emergency Module 3W Self Test	Self-test Emergency Module
UEM03	Universal Emergency Module 3W	Emergency Module
DRC30/DA	Dimmable Driver: 30W DALI, 1- 10V, Primary PUSH Driver	Dimmable Driver
EMPAD01	Neka Emergency Downlight kit 2.5W Manual test	Emergency Module
EMPAD01/ST	Neka Emergency Downlight kit 3.5W Self-test	Self-test Emergency Module

Rated Power (W)	Current (mA)	CCT (K)	Lumen (lm)
16	73	3000	1000
16	73	4000	1100
16	73	5000	1100
20	99	3000	1250
20	99	4000	1380
20	99	5000	1380

Overview

The Faceta LED Commercial Downlight range are retrofit LED lighting for widely used 3", 4", 6" and 8" fluorescent downlights with a distinctive faceted white reflector and a recessed light source.

Available with a switchable CCT and the downlights are compatible with Kosnic's emergency module.




IP65



General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IP Rating	IP65
Nominal Lifetime (h)	50,000 h
Protection Rating	Class III
Installation Area	Internal

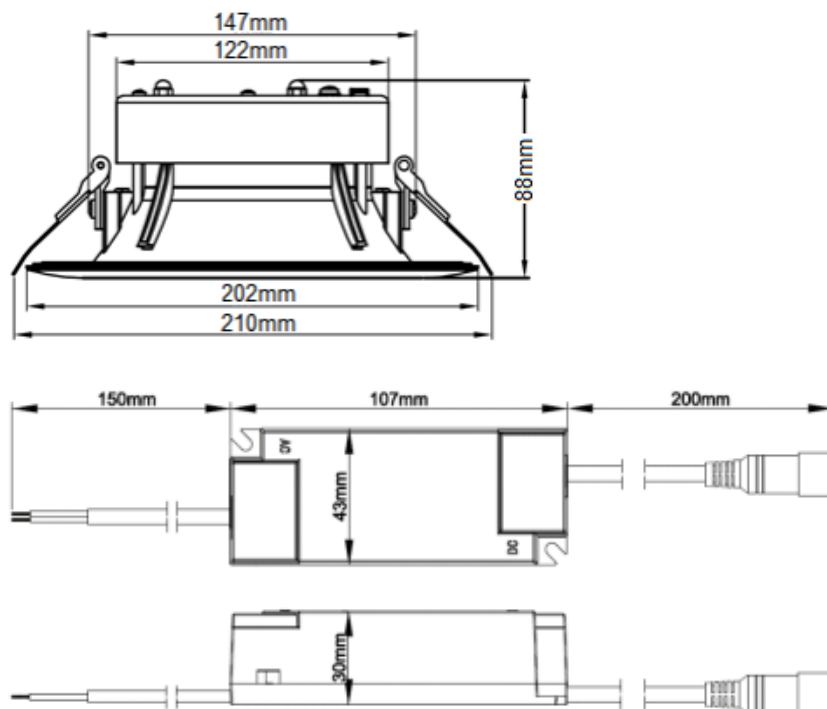

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Kosnic Lighting KosnicUK KosnicLightingUK KosnicUK