

5 5 Years
Product Warranty
UK Only

2 2 Years
On-Site Warranty
Main-land UK Only




Faceta

07073 FAC8IN26-SCT

Faceta, 8 inch LED commercial DL, 26W/22W CCT/W switch

- IP65 when ceiling recess mounted
- Optional drop-down diffusers for KCDDL2622FR65
- Unique faceted white reflector
- Low glare
- Flicker free
- Optional DALI, 1-10V (0-10V) driver (FAC8IN26-SCT)
- Option of CCT switching 3000K, 4000K, 5000K

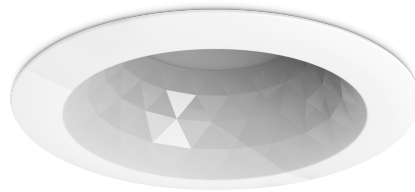

Overview

The Faceta LED Commercial

Downlight range are retrofit LED

lighting for widely used 3", 4", 6" and

8" fluorescent downlights with a

distinctive faceted white reflector

and a recessed light source.

Available with a switchable CCT and

the downlights are compatible with

Kosnic's emergency module.



IP65



General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IP Rating	IP65
Protection Rating	Class III
Installation Area	Internal

Compliance

LVD	EN 60598-1:2024, EN 60598-2-1:2021, EN 62031:2020, EN 62493:2015+A1:2022
EMC	EN 55015:2019+A11:2020, EN 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN 61547:2023
Others	RoHS, WEEE

Technical Summary

Product Code	FAC8IN26-SCT
Default Power	26 W
Settable Wattages	22W, 26W
Driver Code/Part number	CYC030SNL60-70N (DR30C6070)
Driver Maximum Power (W)	30
Driver Output Current (mA)	600/700
Power Factor	0.92
Driver Power Factor	>90
Default CCT	4,000 K
Settable Colour Temperatures	3000k, 4000k, 5000k
SDCM of CCT	<6
CRI	>80
Dimmable	Specific Dimmer
Lumens Output Maximum	2,000 lm
Maximum Efficiency	82 lm/W
Nominal Lifetime (h)	50,000 h
Weight	0.79Kg
Dimensions (L x W x D) (mm)	90xØ253
Cut-Out (mm)	Ø215mm
Beam Angle - Lumi (°)	80

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Kosnic Lighting KosnicUK KosnicLightingUK KosnicUK

5 5 Years
Product Warranty
UK Only

2 2 Years
On-Site Warranty
Main-land UK Only

Faceta



07073 FAC8IN26-SCT

Optional Gear

Product Code	Description	Type
UEM03/ST	3W Universal Emergency Module, Self Test	Self-test Emergency Module
UEM03	3W Universal Emergency Module	Emergency Module
DRC30/DA	Dimmable Driver: 30W DALI, 1-10V, Primary PUSH Driver	Dimmable Driver
EMPAD01	Neka, 1W universal emergency pad for downlight	Emergency Module
EMPAD01/ST	Neka self test 1W universal emergency pad for downlight	Self-test Emergency Module

Accessories

Product Code	Description	Type
FACAG-OPL	Faceta, opal frosted diffuser for 8 inch commercial DL	Diffuser
FACAG-CLR	Faceta, clear frosted diffuser for 8 inch commercial DL	Diffuser

Rated Power (W)	Current (mA)	CCT (K)	Lumen (lm)
22	101	3000	1700
22	101	4000	1800
22	101	5000	1800
26	119	3000	2000
26	119	4000	2130
26	119	5000	2130

Overview

The Faceta LED Commercial Downlight range are retrofit LED lighting for widely used 3", 4", 6" and 8" fluorescent downlights with a distinctive faceted white reflector and a recessed light source. Available with a switchable CCT and the downlights are compatible with Kosnic's emergency module.




IP65



General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IP Rating	IP65
Nominal Lifetime (h)	50,000 h
Protection Rating	Class III
Installation Area	Internal

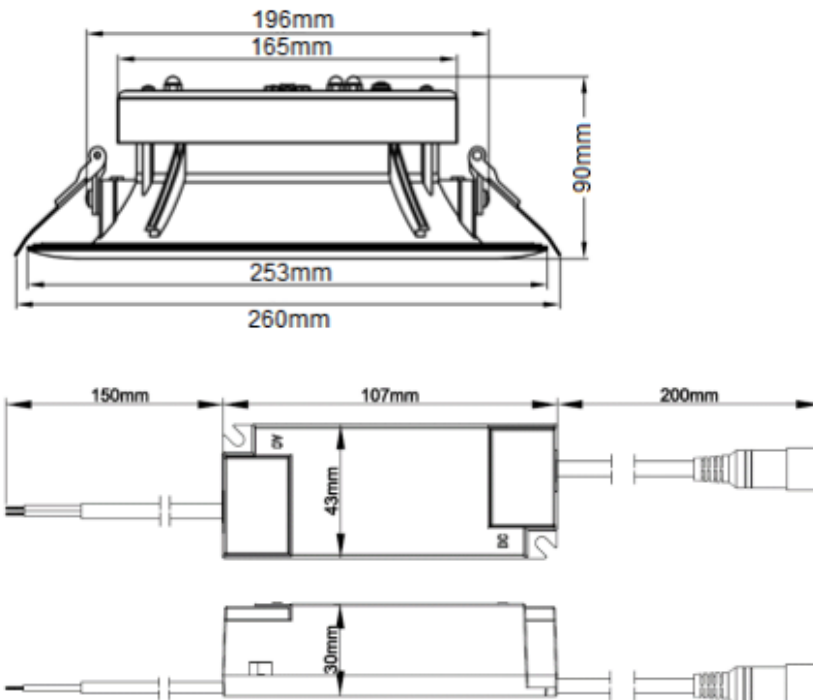

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Kosnic Lighting KosnicUK KosnicLightingUK KosnicUK