

Haldon

07091 HAD110-BLK

Haldon, oval outdoor LED wall light 11W 53°, Black

- Die-cast aluminium body with polycarbonate diffuser
- Choices of circular and oval shapes
- Black and dark grey textured powder coat finishing
- Flicker free
- Switchable CCT (3000K/4000K/5000K)



Overview

Kosnic Haldon wall light comes with integrated LEDs for an efficient energy saving solution. Constructed from die-cast aluminium with a polycarbonate diffuser and is IP54 rated for outdoor use. Available circular or oval with a black or grey finish, offering a simple and elegant solution wherever outdoor wall lighting is required.



IP54



General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK05
IP Rating	IP54
Protection Rating	Class I
Installation Area	Internal and External
L80B10 Lifetime (h) @Ta 25 °C	54,000 h

Compliance

LVD	EN 60598-1:2024, EN 60598-2-1:2021, EN 62493:2015+A1:2022
EMC	EN 55015:2019+A11:2020, EN 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN 61547:2023
Others	UKCA, CE, RoHS, WEEE

Technical Summary

Product Code	HAD110-BLK
Input Voltage Supply	110-240Vac 50/60Hz
Inrush Current (peak/duration) (A)	13.5A / 142µs
Default Power	11 W
Power Factor	0.9
Default CCT	4,000 K
SDCM of CCT	<6
CRI	82
Dimmable	N
Flicker	70%
Lumens Output Maximum	750 lm
Maximum Efficiency	69 lm/W
L70B50 Lifetime (h) @Ta 25 °C	54,000 h
L80B10 Lifetime (h) @Ta 25 °C	54,000 h
L90B10 Lifetime (h) @Ta 25 °C	27,000 h
Nominal Lifetime (h)	50,000 h
Glow wire temperature(°C)	650
Blue Light Hazard	RG1
Weight	0.43Kg
Dimensions (L x W x D) (mm)	140x210x74
Beam Angle - Lumi (°)	53
LS Energy Efficiency Class	E

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com




Kosnic Lighting KosnicUK KosnicLightingUK

07091 HAD110-BLK

Overview

Kosnic Haldon wall light comes with integrated LEDs for an efficient energy saving solution. Constructed from die-cast aluminium with a polycarbonate diffuser and is IP54 rated for outdoor use. Available circular or oval with a black or grey finish, offering a simple and elegant solution wherever outdoor wall lighting is required.

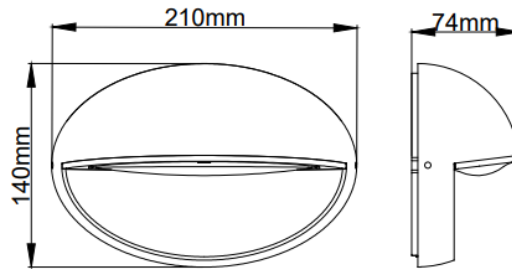

HAD110



IP54



General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK05
IP Rating	IP54
Nominal Lifetime (h)	50,000 h
Protection Rating	Class I
Installation Area	Internal and External

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

