

**7** 7 Years  
Product Warranty  
UK Only

**2** 2 Years  
On-Site Warranty  
Main-land UK Only

# Etna-i

07213 ETN18-SCT

## Etna-I diecast aluminium circular bulkhead 9-18W edge SCT

- Diecast aluminium body
- Switchable CCT (3000/4000/5000K)
- Wattage switchable 9W/12W/18W
- IP65 and vandal resistant (IK10)
- Integrated LED tray
- Optional plug-in emergency module available in standard or self test
- Optional microwave sensor
- Flicker free
- 20mm Conduit entry
- BESA box fitting points



## Overview

The Etna-I matches the look of the

Etna with an integrated LED tray.

With 3 wattage and CCT options the

IP65 rating



IP65



## General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK10
IP Rating	IP65
Protection Rating	Class I
Installation Area	Internal and External
L80B10 Lifetime (h) @Ta 25 °C	54,000 h

## Compliance

Others UKCA, CE, RoHS, WEEE

## Technical Summary

Product Code	ETN18-SCT
Input Voltage Supply	220-240Vac 50/60Hz
Inrush Current (peak/duration) (A)	6.4 A / 1.2 us
Settable Wattages	9W, 12W, 18W
Settable Colour Temperatures	3000K, 4000K, 5000K
SDCM of CCT	<6
CRI	82
Dimmable	N
Flicker	<2%
Lumens Output Maximum	1,570 lm
Maximum Efficiency	92 lm/W
Maintained Luminous Flux	110 lm
L70B50 Lifetime (h) @Ta 25 °C	54,000 h
L80B10 Lifetime (h) @Ta 25 °C	54,000 h
L90B10 Lifetime (h) @Ta 25 °C	26,000 h
Nominal Lifetime (h)	50,000 h
Glow wire temperature(°C)	650
Blue Light Hazard	RG1
Weight	0.9Kg
Dimensions (L x W x D) (mm)	294xØ85
BESA Entry	True
Conduit Entry 20mm	Yes
LS Energy Efficiency Class	E

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Kosnic Lighting KosnicUK

KosnicLightingUK

**7** 7 Years  
Product Warranty  
UK Only

**2** 2 Years  
On-Site Warranty  
Main-land UK Only

# Etna-i



07213 ETN18-SCT

## Optional Gear

Product Code	Description	Type
MWS-DC	Plug-in microwave motion sensor 12V DC PWM	Microwave Sensor
EMDD02/ST	2W self-test emergency module for LED DD and bulkhead	Self-test Emergency Module
EMDD02	2W standard emergency module for LED DD and bulkhead	Emergency Module
RMW-DC	Plug in microwave motion and daylight sensor 12V DC	Microwave Sensor

## Accessories

Product Code	Description	Type
RMT-UNI	Universal Remote Control for Kosnic motion sensors	Remote Control

Rated Power (W)	Current (mA)	CCT (K)	Total Lumen (lm)	Power Factor
9	44	3000 Warm White	800	0.88
9	44	4000 Cool White	820	0.88
9	44	5000 Day Light	820	0.88
12	56	3000 Warm White	960	0.92
12	56	4000 Cool White	1050	0.92
12	56	5000 Day Light	1050	0.92
18	82	3000 Warm White	1400	0.95
18	82	4000 Cool White	1570	0.95
18	82	5000 Day Light	1570	0.95

## Overview

The Etna-I matches the look of the Etna with an integrated LED tray. With 3 wattage and CCT options the IP65 rating




**IP65**



## General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK10
IP Rating	IP65
Nominal Lifetime (h)	50,000 h
Protection Rating	Class I
Installation Area	Internal and External

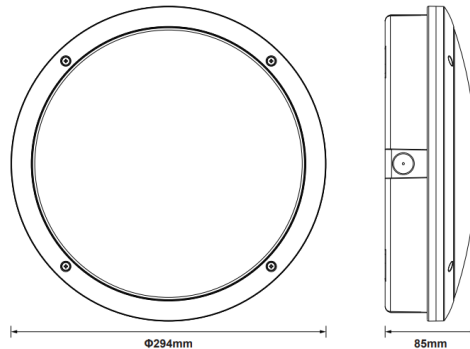

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Kosnic Lighting KosnicUK KosnicLightingUK KosnicUK