5 Years
Product Warranty
UK Only

2 Years
On-Site Warranty
Main-land UK Only


Manot Hilux

Kosnic
LIGHTING • SIMPLY BETTER

07494 MAH0804

Manot Hilux Emergency Bulkhead 8W Manual test 6500K

- High Emergency output of 1000lm
- 90° lens by default, user may remove the lens to have 120° light spread
- Maintained and non-maintained option
- Surface and recessed mounting positions
- Optional tilting bracket
- IP65 and IK10 (vandal resistant) for external uses
- BESA box fitting points

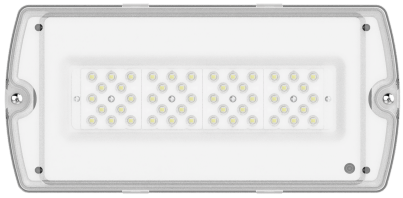





Overview

The Manot Hilux LED Emergency Exit Bulkhead is a self-contained, multi-purpose, maintained or non-maintained 3 hour emergency solution. Can be surface mounted, recessed or installed with a tilting bracket. Comes with upward arrow exit sign for wall mounting and can be used without signs as an emergency light. Self-test option

IP65

General Information

IK Rating	IK10
IP Rating	IP65
Protection Rating	Class II
Installation Area	Internal and External
UEM/EME Protection	Class II

Compliance

LVD	EN 60598-1:2024, EN 60598-2-22:2022, EN 61347-1:2015+A1:2021, EN 61347-2-7:2012+A1:2021, EN 61347-2-13:2014+A1:2017, EN 62031:2020, EN 62493:2015+A1:2022
Others	UKCA, CE, RoHS, WEEE, REACH

Technical Summary	
Product Code	MAH0804
Default CCT	6,500 K
Lumens Output Maximum	1,000 lm
Maximum Efficiency	125 lm/W
Emergency Luminous Flux	1,000 lm
Maintained Luminous Flux	500 lm
Weight	0.7Kg
Dimensions (L x W x D) (mm)	158x325x48
UEM/EME Battery Life	4 y
UEM/EME Input Voltage	220-240Vac 50/60Hz
UEM/EME Ambient Temperature Range	0°C to 40°C
UEM/EME Power Factor	0.6
Emergency Modes	Maintained or Non-maintained
UEM/EME Test Function	Manual
UEM/EME CCT	6,500 K
UEM/EME Input Power (Max)	8 W
UEM/EME Protection	Class II
UEM/EME Weight	0.65 kg
UEM/EME Dimensions (L x W x D) (mm)	158x325x48
UEM/EME Emergency Operation Test	Manual

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

Kosnic Lighting KosnicUK KosnicLightingUK

5 Years
Product Warranty
UK Only

2 Years
On-Site Warranty
Main-land UK Only

Manot Hilux

Kosnic
LIGHTING • SIMPLY BETTER

07494 MAH0804

Overview

The Manot Hilux LED Emergency Exit Bulkhead is a self-contained, multi-purpose, maintained or non-maintained 3 hour emergency solution. Can be surface mounted, recessed or installed with a tilting bracket. Comes with upward arrow exit sign for wall mounting and can be used without signs as an emergency light. Self-test option


IP65


General Information

IK Rating	IK10
IP Rating	IP65
Protection Rating	Class II
Installation Area	Internal and External
UEM/EME Protection	Class II

Accessories

Product Code	Description	Type
BAT48LI2	Manot Hilux battery	Battery
MAN-BKT	Manot, Wall-mount Tilting Bracket	Clips/Brackets
MAN-REC	Manot, Spring Clips for Recessed Installation	Clips/Brackets

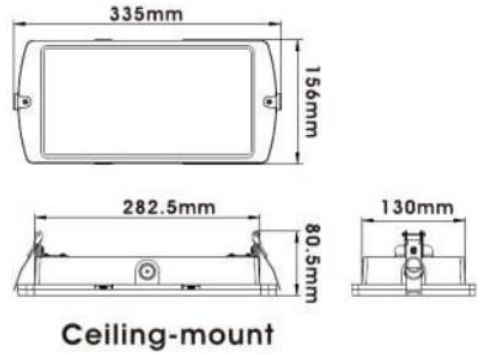

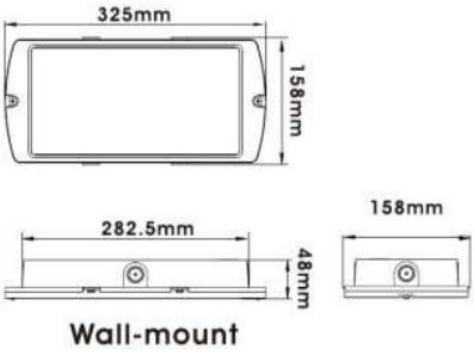

Tel: 01635 523 713
Email: sales@kosnic.com
Kosnic.com
Kosnic Lighting KosnicUK KosnicLightingUK KosnicUK