

4 4 Years
Product Warranty
UK Only

2 2 Years
On-Site Warranty
Main-land UK Only

Kalem

07584 KAL0105

Kalem Emergency panel exit box 5W Manual test 6500K

- Slim profile LED panel
- Edge lit
- Uniform back light
- Hidden slot at the frame for attaching exit sign film
- Maintained and non-maintained options
- Available in self-test version

Overview

Kalem, slim profile LED emergency panel with uniform back light and edge lit. The fitting is wall mounted panel that can be used as a standard emergency luminaire without the exit sign graphic. There is a hidden slot at the frame for attaching exit sign graphic. Supplied with the upward arrow exit sign.



IP20



General Information

IP Rating	IP20
Protection	Class I
Rating	
Installation Area	Internal
UEM/EME Protection	Class I

Compliance

LVD	EN 60598-1:2024, EN 60598-2-22:2022, EN 62031:2020, EN 62471:2008, EN 62493:2015+A1:2022
Others	UKCA, CE, RoHS, WEEE, REACH

Technical Summary

Product Code	KAL0105
Lumens Output Maximum	80 lm
Maximum Efficiency	80 lm/W
Emergency Luminous Flux	80 lm
Maintained Luminous Flux	80 lm
Weight	1.21Kg
Dimensions (L x W x D) (mm)	378x192x48
UEM/EME Battery Life	4 y
UEM/EME Input Voltage	220-240Vac 50/60Hz
UEM/EME Ambient Temperature Range	0°C to 40°C
UEM/EME Power Factor	0.41
Emergency Modes	Maintained or Non-maintained
UEM/EME Test Function	Manual
UEM/EME CCT	6,500 K
UEM/EME Input Power (Max)	5 W
UEM/EME Protection	Class I
UEM/EME Weight	1.14 kg
UEM/EME Dimensions (L x W x D) (mm)	192x380x35
UEM/EME Emergency Operation Test	Manual

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Kosnic Lighting KosnicUK KosnicLightingUK

4 4 Years
Product Warranty
UK Only

2 2 Years
On-Site Warranty
Main-land UK Only

Kalem

07584 KAL0105

Accessories

Product Code	Description	Type
KBAT2600LI1	Li-ion Battery Pack, 2600mAh for self test versions of Manot, Mulu, Belum, Kalem, Nitro, Nitro surface, Doxa	Battery
KBAT2000LI1	Li-ion battery 3.7V 2000mAh for self test DD EME	Battery

Overview

Kalem, slim profile LED emergency panel with uniform back light and edge lit. The fitting is wall mounted panel that can be used as a standard emergency luminaire without the exit sign graphic. There is a hidden slot at the frame for attaching exit sign graphic. Supplied with the upward arrow exit sign.




IP20



General Information

IP Rating	IP20
Protection Rating	Class I
Installation Area	Internal
UEM/EME Protection	Class I

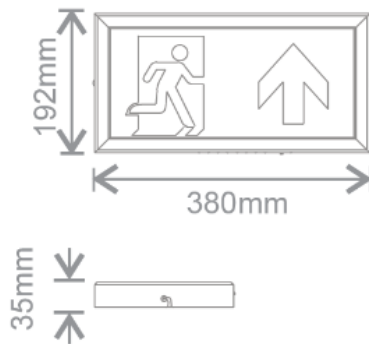

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Kosnic Lighting KosnicUK KosnicLightingUK KosnicUK