3 Years
Product Warranty
UK Only

# Reon GLS

Kosnic
LIGHTING • SIMPLY BETTER

07627 A9.5-BC65

## A60 (GLS) 9.5W BC (B22) 6500K Frosted

- High efficiency up to 138lm/W
- Replacement for incandescent GLS
- Save energy by up to 90%
- Choices of 2700K, 4000K, 6500K
- Dimmable options



## Overview

The Classic shaped GLS from Kosnic is a selected line of energy saving retrofit LED lamps. Reliable, affordable and easy to install.

IP20

## General Information

| | |
|---|---|
| Ambient Temperature Range (°C) | -20°C to 40°C |
| IP Rating | IP20 |
| Protection Rating | Class II |
| Installation Area | Internal |
| L80B10 Lifetime (h) @Ta 25 °C | 9,000 h |

## Compliance

| | |
|---|---|
| LVD | EN 62031:2020, EN 62471:2008, EN 62493:2015+A1:2022, EN 62560:2012+A11:2019 |
| EMC | EN 55015:2019+A11:2020, EN 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN 61547:2023 |
| Others | UKCA, CE, RoHS, WEEE |

| Technical Summary | |
|---|---|
| Product Code | A9.5-BC65 |
| Input Voltage Supply | 220-240Vac 50/60Hz |
| Inrush Current (peak/duration) (A) | 4.2A/200us |
| Default Power | 9.5 W |
| Power Factor | 0.55 |
| Default CCT | 6,500 K |
| SDCM of CCT | <6 |
| CRI | 80 |
| Dimmable | N |
| Flicker | <1% |
| Lumens Output Maximum | 1,055 lm |
| Maximum Efficiency | 111 lm/W |
| L70B50 Lifetime (h) @Ta 25 °C | 15,000 h |
| L80B10 Lifetime (h) @Ta 25 °C | 9,000 h |
| L90B10 Lifetime (h) @Ta 25 °C | 4,000 h |
| Nominal Lifetime (h) | 15,000 h |
| Glow wire temperature(°C) | 650 |
| Blue Light Hazard | RG1 |
| Weight | 0.044Kg |
| Dimensions (L x W x D) (mm) | 107x∅60 |
| Beam Angle - Lumi (°) | 180 |
| LS Energy Efficiency Class | E |

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

Kosnic Lighting KosnicUK KosnicLightingUK

3 Years
Product Warranty
UK Only

# Reon GLS

Kosnic
LIGHTING • SIMPLY BETTER

07627 A9.5-BC65

## Overview

The Classic shaped GLS from Kosnic is a selected line of energy saving retrofit LED lamps. Reliable, affordable and easy to install.

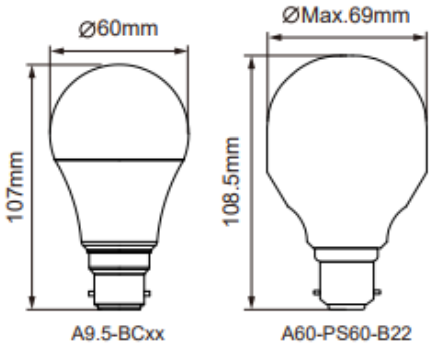


IP20

## General Information

| | |
|---|---|
| Ambient Temperature Range (°C) | -20°C to 40°C |
| IP Rating | IP20 |
| Nominal Lifetime (h) | 15,000 h |
| Protection Rating | Class II |
| Installation Area | Internal |


Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

Kosnic Lighting KosnicUK KosnicLightingUK KosnicUK