

Reon GLS

07822 A9.5-ES65

A60 (GLS) 9.5W ES (E27) 6500K Frosted

- High efficiency up to 138lm/W
- Replacement for incandescent GLS
- Save energy by up to 90%
- Choices of 2700K, 4000K, 6500K
- Dimmable options



Overview

The Classic shaped GLS from Kosnic is a selected line of energy saving retrofit LED lamps. Reliable, affordable and easy to install.



General Information

Ambient Temperature Range (°C)	-20°C to 40°C
IP Rating	IP20
Protection Rating	Class II
Installation Area	Internal
L80B10 Lifetime (h) @Ta 25 °C	9,000 h

Compliance

LVD	EN 62031:2020, EN 62471:2008, EN 62493:2015+A1:2022, EN 62560:2012+A11:2019
EMC	EN 55015:2019+A11:2020, EN 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN 61547:2023
Others	UKCA, CE, RoHS, WEEE

Technical Summary

Product Code	A9.5-ES65
Input Voltage Supply	220-240Vac 50/60Hz
Inrush Current (peak/duration) (A)	4.2A/200us
Default Power	9.5 W
Power Factor	0.55
Default CCT	6,500 K
SDCM of CCT	<6
CRI	80
Dimmable	N
Flicker	<1%
Lumens Output Maximum	1,055 lm
Maximum Efficiency	111 lm/W
L70B50 Lifetime (h) @Ta 25 °C	15,000 h
L80B10 Lifetime (h) @Ta 25 °C	9,000 h
L90B10 Lifetime (h) @Ta 25 °C	4,000 h
Nominal Lifetime (h)	15,000 h
Glow wire temperature(°C)	650
Blue Light Hazard	RG1
Weight	0.044Kg
Dimensions (L x W x D) (mm)	109xØ60
Beam Angle - Lumi (°)	180
LS Energy Efficiency Class	E

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com




Kosnic Lighting KosnicUK KosnicLightingUK

07822 A9.5-ES65

Overview

The Classic shaped GLS from Kosnic is a selected line of energy saving retrofit LED lamps. Reliable, affordable and easy to install.

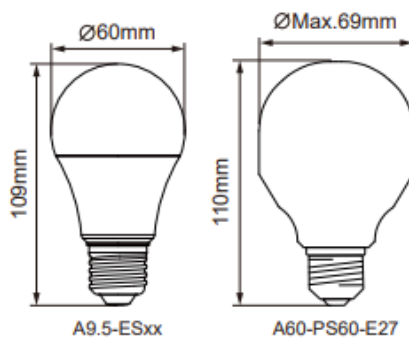

IP20



General Information

Ambient Temperature Range (°C)	-20°C to 40°C
IP Rating	IP20
Nominal Lifetime (h)	15,000 h
Protection Rating	Class II
Installation Area	Internal

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

