

7 7 Years
Product Warranty
UK Only

2 2 Years
On-Site Warranty
Main-land UK Only



Trent 3



07833 TRE32F18-SCT/DA

Trent 3 2ft non-corrosive 10-18W CCT switchable DALI

- Switchable CCT (3000/4000/6000k)
- High efficiency up to 175lm/W
- 4 Switchable wattages for each model
- Optional plug-in emergency modules available in manual, self-test and DALI
- Durable and rugged IK10 polycarbonate construction
- DALI-2 DT 6, DSI, switchDIM, corridor FUNCTION V2 option available
- Suitable for through-wiring
- Opal diffuser

Overview

Trent has a range of lengths from 2 ft to 6 ft. All are CCT switchable with settings for 3000k, 4000k and 6000k as well as wattage switchable with 4 settings allowing for customization in situ.

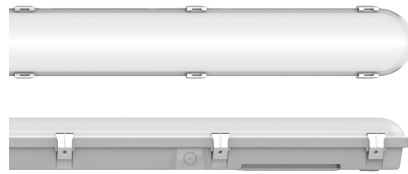

IP65



General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK10
IP Rating	IP65
Protection Rating	Class I
Installation Area	Internal and External
L80B10 Lifetime (h) @Ta 25 °C	54,000 h

Compliance

LVD	EN 60598-1:2024, EN 60598-2-1:2021, EN 62031:2020, EN 62493:2015+A1:2022
EMC	EN 55015:2019+A11:2020, EN 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN 61547:2023
Others	UKCA, CE, RoHS, WEEE

Technical Summary

Product Code	TRE32F18-SCT/DA
Input Voltage Supply	220-240Vac 50/60Hz
Inrush Current (peak/duration) (A)	31A/262 µs
Settable Wattages	10W, 12W, 15W, 18W
Driver Code/Part number	Tridonic LC-xxW
Power Factor	0.90
Settable Colour Temperatures	3000K, 4000K, 6000K
SDCM of CCT	<6
CRI	82
Dimmable	N
Flicker	<1%
Lumens Output Maximum	3,060 lm
Maximum Efficiency	141 lm/W
Maintained Luminous Flux	350 lm
L70B50 Lifetime (h) @Ta 25 °C	54,000 h
L80B10 Lifetime (h) @Ta 25 °C	54,000 h
L90B10 Lifetime (h) @Ta 25 °C	51,000 h
Nominal Lifetime (h)	50,000 h
Glow wire temperature(°C)	650
Blue Light Hazard	RG1
Weight	0.9Kg
Dimensions (L x W x D) (mm)	668x99x82
LS Energy Efficiency Class	D

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Kosnic Lighting KosnicUK KosnicLightingUK

7 Years
Product Warranty
UK Only

2 Years
On-Site Warranty
Main-land UK Only

Trent 3

07833 TRE32F18-SCT/DA

Accessories

Product Code	Description	Type
SUS-BTN04	Suspension for Niva Kasai Kennet Milo Congo Trent Avon Indus, 4 wires included, max. 1m drop	Suspension Kit
SUS-BTN04/25	Batten Suspension Kits 2.5m length, 4 wires included	Suspension Kit

Overview

Trent has a range of lengths from 2 ft to 6 ft. All are CCT switchable with settings for 3000k, 4000k and 6000k as well as wattage switchable with 4 settings allowing for customization in situ.

Rated Power (W)	Current (mA)	CCT (k)	Luminous Flux (lm)	Power Factor
10	48	3000 Warm White	1300	0.9
10	48	4000 Cool White	1400	0.9
10	48	6000 Day Light	1300	0.9
12	56	3000 Warm White	1500	0.93
12	56	4000 Cool White	1700	0.93
12	56	6000 Day Light	1500	0.93
15	69	3000 Warm White	1900	0.95
15	69	4000 Cool White	2100	0.95
15	69	6000 Day Light	1900	0.95
18	82	3000 Warm White	2200	0.95
18	82	4000 Cool White	2500	0.95
18	82	6000 Day Light	2200	0.95



IP65



General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK10
IP Rating	IP65
Nominal Lifetime (h)	50,000 h
Protection Rating	Class I
Installation Area	Internal and External



Product Code	Length(mm)
TRE32F18-SCT	668
TRE34F35-SCT	1270
TRE35F48-SCT	1570
TRE36F62-SCT	1870

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

