

7 7 Years
Product Warranty
UK Only

2 2 Years
On-Site Warranty
Main-land UK Only




Trent 3

07837 TRE35F48-SCT

Trent 3 5ft non-corrosive 27-48W CCT switchable

- Switchable CCT (3000/4000/6000k)
- High efficiency up to 175lm/W
- 4 Switchable wattages for each model
- Optional plug-in emergency modules available in manual, self-test and DALI
- Durable and rugged IK10 polycarbonate construction
- DALI-2 DT 6, DSI, switchDIM, corridor FUNCTION V2 option available
- Optional plug-in ON/OFF sensor compatible with Uni-Remote
- Suitable for through-wiring
- Opal diffuser

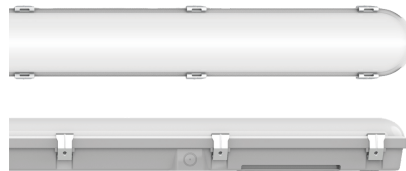

Overview

Trent has a range of lengths from 2 ft to 6 ft. All are CCT switchable with settings for 3000k, 4000k and 6000k as well as wattage switchable with 4 settings allowing for customization in situ.



IP65



General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK10
IP Rating	IP65
Protection Rating	Class I
Installation Area	Internal and External
L80B10 Lifetime (h) @Ta 25 °C	54,000 h

Compliance

LVD	EN 60598-1:2024, EN 60598-2-1:2021, EN 62031:2020, EN 62493:2015+A1:2022
EMC	EN 55015:2019+A11:2020, EN 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN 61547:2023
Others	UKCA, CE, RoHS, WEEE

Technical Summary

Product Code	TRE35F48-SCT
Input Voltage Supply	220-240Vac 50/60Hz
Inrush Current (peak/duration) (A)	35.7A / 135µs
Settable Wattages	27W, 34W, 41W, 48W
Driver Code/Part number	Tridonic LC xxW
Power Factor	0.90
Settable Colour Temperatures	3000K, 4000K, 6000K
SDCM of CCT	<6
CRI	82
Dimmable	N
Flicker	<1%
Lumens Output Maximum	8,160 lm
Maximum Efficiency	150 lm/W
Maintained Luminous Flux	350 lm
L70B50 Lifetime (h) @Ta 25 °C	54,000 h
L80B10 Lifetime (h) @Ta 25 °C	54,000 h
L90B10 Lifetime (h) @Ta 25 °C	51,000 h
Nominal Lifetime (h)	50,000 h
Glow wire temperature(°C)	650
Blue Light Hazard	RG1
Weight	1.9Kg
Dimensions (L x W x D) (mm)	1570x99x82
LS Energy Efficiency Class	D

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Kosnic Lighting KosnicUK KosnicLightingUK

7 7 Years
Product Warranty
UK Only

2 2 Years
On-Site Warranty
Main-land UK Only

Trent 3



07837 TRE35F48-SCT

Overview

Trent has a range of lengths from 2 ft to 6 ft. All are CCT switchable with settings for 3000k, 4000k and 6000k as well as wattage switchable with 4 settings allowing for customization in situ.

Optional Gear

Product Code	Description	Type
BEM303/SST	BEM Duo 3W Manual/Self test emergency module for Kosnic battens	Emergency Module
BEM303/DA	BEM 3W DALI switchable for Kosnic Battens	Emergency Module
HON-M	Hontza Plug in microwave motion & daylight sensor	Microwave Sensor
TOC-P	Toco P30 Exterior PIR Sensor Side-Mount with RMT-UNI control	PIR Sensor

Accessories

Product Code	Description	Type
SUS-BTN04	Suspension for Niva Kasai Kennet Milo Congo Trent Avon Indus, 4 wires included, max. 1m drop	Suspension Kit
SUS-BTN04/25	Batten Suspension Kits 2.5m length, 4 wires included	Suspension Kit
RMT-UNI	Universal Remote Control for Kosnic motion sensors	Remote Control



IP65



General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK10
IP Rating	IP65
Nominal Lifetime (h)	50,000 h
Protection Rating	Class I
Installation Area	Internal and External

Rated Power (W)	Current (mA)	CCT (k)	Luminous Flux (lm)	Power Factor
27	127.6	3000 Warm White	3800	0.92
27	127.6	4000 Cool White	4000	0.92
27	127.6	6000 Day Light	3800	0.92
34	155.6	3000 Warm White	4800	0.95
34	155.6	4000 Cool White	5100	0.95
34	155.6	6000 Day Light	4800	0.95
41	185.7	3000 Warm White	5500	0.96
41	185.7	4000 Cool White	6000	0.96
41	185.7	6000 Day Light	5500	0.96
48	217.4	3000 Warm White	6300	0.96
48	217.4	4000 Cool White	7000	0.96
48	217.4	6000 Day Light	6300	0.96

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Kosnic Lighting KosnicUK KosnicLightingUK KosnicUK

7 Years
Product Warranty
UK Only

2 Years
On-Site Warranty
Main-land UK Only



Trent 3

07837 TRE35F48-SCT



Product Code	Length(mm)
TRE32F18-SCT	668
TRE34F35-SCT	1270
TRE35F48-SCT	1570
TRE36F62-SCT	1870

Overview

Trent has a range of lengths from 2 ft to 6 ft. All are CCT switchable with settings for 3000k, 4000k and 6000k as well as wattage switchable with 4 settings allowing for customization in situ.



IP65



General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK10
IP Rating	IP65
Nominal Lifetime (h)	50,000 h
Protection Rating	Class I
Installation Area	Internal and External

Optional Sensor Code	RMW-AC (Not suitable for DALI version)
Sensor Type	Microwave
Input Voltage	220-240Vac 50/60Hz
Working Mode	On/Off
HF System	5.8GHz ± 75MHz ISM band / 0.5 mW max
Standby Power	≤0.5 W
Protection	IP20
Transmitting power	≤0.5 mW
Load	400W (Inductive) 800W (resistive) @ 230Vac
Mounting Height	Max 6 m
Detection Area Radius	Max 5 m (100 % / 75 % / 50 % / 25 % settings) (set by DIP switch or remote control)
Detection Angle	150° wall mounting, 360° ceiling mounting
Hold time	5 sec / 1 min / 5 min / 30 min (set by DIP switch or remote control)
Daylight sensor	30 lux / Disabled (set by DIP switch) 30 lux / 100 lux / 300 lux / Disabled (set by remote control)
Override Function	Yes
Corridor Function	No

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

