

**7** 7 Years  
Product Warranty  
UK Only

**2** 2 Years  
On-Site Warranty  
Main-land UK Only



# Trent 3


07838 TRE35F48-SCT/DA

## Trent 3 5ft non-corrosive 27-48W CCT switchable DALI

- Switchable CCT (3000/4000/6000k)
- High efficiency up to 160lm/W
- 4 Switchable wattages for each model
- Optional plug-in Emergency or ON/OFF sensorDALI
- Durable and rugged IK10 polycarbonate construction
- DALI-2 DT 6, DSI, switchDIM, corridor FUNCTION V2 option available
- Corridor sensor option available
- Suitable for through-wiring
- Opal diffuser

### Overview

Trent has a range of lengths from 2 ft to 6 ft. All are CCT switchable with settings for 3000k, 4000k and 6000k as well as wattage switchable with 4 settings allowing for customization in situ.

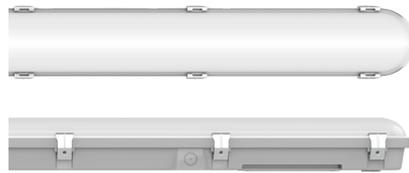

**IP65**



### General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK10
IP Rating	IP65
Protection Rating	Class I
Installation Area	Internal and External
L80B10 Lifetime (h) @Ta 25 °C	54,000 h

### Compliance

LVD	EN 60598-1:2024, EN 60598-2-1:2021, EN 62031:2020, EN 62493:2015+A1:2022
EMC	EN 55015:2019+A11:2020, EN 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN 61547:2023
Others	UKCA, CE, RoHS, WEEE

### Technical Summary

Product Code	TRE35F48-SCT/DA
Input Voltage Supply	220-240Vac 50/60Hz
Inrush Current (peak/duration) (A)	31A/262 μs
Settable Wattages	27W, 34W, 41W, 48W
Driver Code/Part number	Tridonic LC-xxW
Power Factor	0.90
Settable Colour Temperatures	3000K, 4000K, 6000K
SDCM of CCT	<6
CRI	82
Dimmable	N
Flicker	<1%
Lumens Output Maximum	8,160 lm
Maximum Efficiency	150 lm/W
Maintained Luminous Flux	350 lm
L70B50 Lifetime (h) @Ta 25 °C	54,000 h
L80B10 Lifetime (h) @Ta 25 °C	54,000 h
L90B10 Lifetime (h) @Ta 25 °C	51,000 h
Nominal Lifetime (h)	50,000 h
Glow wire temperature(°C)	650
Blue Light Hazard	RG1
Weight	1.9Kg
Dimensions (L x W x D) (mm)	1570x99x82
LS Energy Efficiency Class	D

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Kosnic Lighting KosnicUK KosnicLightingUK

**7** Years  
Product Warranty  
UK Only

**2** Years  
On-Site Warranty  
Main-land UK Only



# Trent 3

07838 TRE35F48-SCT/DA

## Optional Gear

Product Code	Description	Type
BEM303/SST	BEM Duo 3W Manual/Self test emergency module for Kosnic batters	Emergency Module
BEM303/DA	BEM 3W DALI switchable for Kosnic Batters	Emergency Module

## Accessories

Product Code	Description	Type
SUS-BTN04	Suspension for Niva Kasai Kennet Milo Congo Trent Avon Indus, 4 wires included, max. 1m drop	Suspension Kit
SUS-BTN04/25	Batten Suspension Kits 2.5m length, 4 wires included	Suspension Kit

## Overview

Trent has a range of lengths from 2 ft to 6 ft. All are CCT switchable with settings for 3000k, 4000k and 6000k as well as wattage switchable with 4 settings allowing for customization in situ.




**IP65**



## General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK10
IP Rating	IP65
Nominal Lifetime (h)	50,000 h
Protection Rating	Class I
Installation Area	Internal and External

Rated Power (W)	Current (mA)	CCT (k)	Luminous Flux (lm)	Power Factor
27	127.6	3000 Warm White	3800	0.92
27	127.6	4000 Cool White	4000	0.92
27	127.6	6000 Day Light	3800	0.92
34	155.6	3000 Warm White	4800	0.95
34	155.6	4000 Cool White	5100	0.95
34	155.6	6000 Day Light	4800	0.95
41	185.7	3000 Warm White	5500	0.96
41	185.7	4000 Cool White	6000	0.96
41	185.7	6000 Day Light	5500	0.96
48	217.4	3000 Warm White	6300	0.96
48	217.4	4000 Cool White	7000	0.96
48	217.4	6000 Day Light	6300	0.96



Product Code	Length(mm)
TRE32F18-SCT	668
TRE34F35-SCT	1270
TRE35F48-SCT	1570
TRE36F62-SCT	1870

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Kosnic Lighting KosnicUK KosnicLightingUK KosnicUK