

# Albury

07897 ALBP-OPL/S

## Albury sensor bollard ext light Opal E27 lamp holder

- Die-cast aluminium body with polycarbonate housing
- Options of 3 mounting styles: wall, angled and bollard
- Option of smoky grey diffuser, ideal for filament lamps



### Overview

Albury comes in varies versatile mounting styles: Bollard, Wall and Angled. They are IP65 with diecast aluminium housing which will be suitable for many domestic and commercial outdoor lighting requirements.



**IP65**



### General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK10
IP Rating	IP65
Protection Rating	Class I
Installation Area	External

### Compliance

LVD	EN 60598-1:2024, EN 60598-2-1:2021
Others	UKCA, CE, RoHS, WEEE

### Technical Summary

Product Code	ALBP-OPL/S
Input Voltage Supply	220-240Vac 50/60Hz
Dimensions (L x W x D) (mm)	800xØ130 (base)xØ105 (top)

Tel: 01635 523 713

Email: [sales@kosnic.com](mailto:sales@kosnic.com)


[Kosnic.com](http://Kosnic.com)



07897 ALBP-OPL/S

## Overview

Albury comes in various versatile mounting styles: Bollard, Wall and Angled. They are IP65 with diecast aluminium housing which will be suitable for many domestic and commercial outdoor lighting requirements.




ALBP/S



## General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK10
IP Rating	IP65
Protection Rating	Class I
Installation Area	External

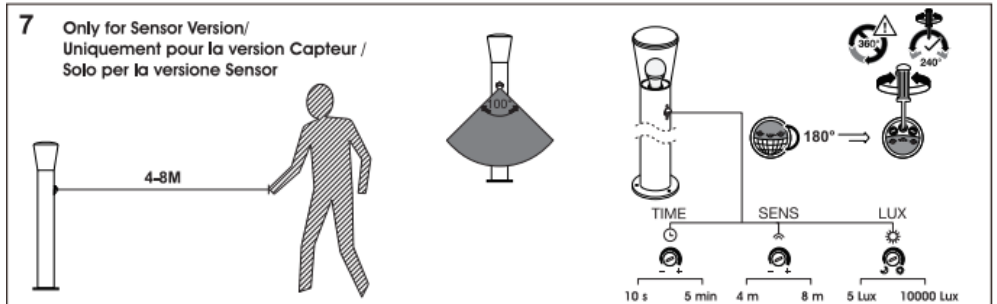

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

