3 Years
Product Warranty
UK Only


Aspen

Kosnic
LIGHTING • SIMPLY BETTER

07913 ASPR20-GRY

Aspen 20W Up and Down Rectangle LED Wall Light Grey

- Adjustable beam angle, 0-90
- Push-fit terminals for fast and easy wiring
- Two cable entries, loop in and loop out
- Die-cast aluminium body with grey and black finishing options

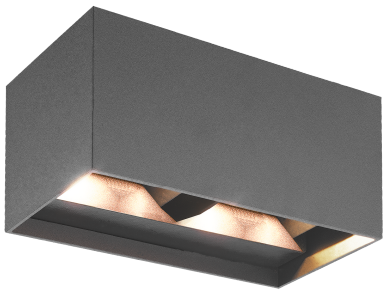

Overview

Aspen provides a modern look to any domestic and commercial outdoor lighting requirements. With options of grey or black finishing, adjustable beam angle and switchable CCT to suit different lighting moods.

IP65

General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK02
IP Rating	IP65
Protection Rating	Class I
Installation Area	Internal and External
L80B10 Lifetime (h) @Ta 25 °C	58,000 h

Compliance

LVD	EN 60598-1:2024, EN 60598-2-1:2021, EN 62493:2015+A1:2022
EMC	EN 55015:2019+A11:2020, EN 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN 61547:2023
Others	UKCA, CE, RoHS, WEEE

Technical Summary	
Product Code	ASPR20-GRY
Input Voltage Supply	220-240Vac 50/60Hz
Inrush Current (peak/duration) (A)	24.4A/3.3us
Default Power	20 W
Power Factor	0.5
Settable Colour Temperatures	3000K, 4000K, 6500K
SDCM of CCT	<6
CRI	82
Dimmable	N
Flicker	<1%
Lumens Output Maximum	1,137 lm
Maximum Efficiency	57 lm/W
L70B50 Lifetime (h) @Ta 25 °C	91,000 h
L80B10 Lifetime (h) @Ta 25 °C	58,000 h
L90B10 Lifetime (h) @Ta 25 °C	28,000 h
Nominal Lifetime (h)	50,000 h
Glow wire temperature(°C)	650
Blue Light Hazard	RG1
Weight	1.02Kg
Dimensions (L x W x D) (mm)	200x100x100
Beam Angle - Lumi (°)	0-90
LS Energy Efficiency Class	E

Tel: 01635 523 713
Email: sales@kosnic.com
Kosnic.com
Kosnic Lighting KosnicUK KosnicLightingUK

3 Years
Product Warranty
UK Only

Aspen


Kosnic
LIGHTING • SIMPLY BETTER

07913 ASPR20-GRY

Rated Power (W)	CCT (K)	Total Lumen (lm)
20	3000 Warm White	990
20	4000 Cool White	1137
20	6500 Day Light	1053

Overview

Aspen provides a modern look to any domestic and commercial outdoor lighting requirements. With options of grey or black finishing, adjustable beam angle and switchable CCT to suit different lighting moods.

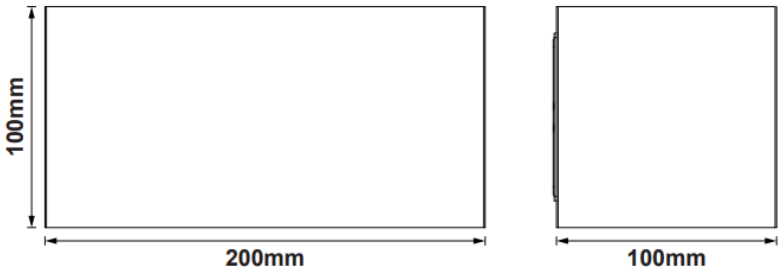

ASPR12 & ASPR20

IP65

General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK02
IP Rating	IP65
Nominal Lifetime (h)	50,000 h
Protection Rating	Class I
Installation Area	Internal and External

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

Kosnic Lighting KosnicUK KosnicLightingUK KosnicUK