

7 7 Years
Product Warranty
UK Only

2 2 Years
On-Site Warranty
Main-land UK Only

Pollux

07919 PLX16-SCT



Pollux 16W mains dimmable slim LED wall light CCT switchable

- CCT switchable 3000K/4000k/5000K
- Flicker free
- Up and down luminous function



Overview

The Pollux slim profile LED wall light offers a low maintenance solution to lighting for all areas, with switchable CCT to meet your different ambient needs.



General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK03
IP Rating	IP20
Protection Rating	Class I
Installation Area	Internal and External
L80B10 Lifetime (h) @Ta 25 °C	54,000 h

Compliance

LVD	EN 60598-1:2024, EN 60598-2-1:2021, EN 62031:2020
EMC	EN 55015:2019+A11:2020, EN 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN 61547:2023
Others	UKCA, CE, RoHS, WEEE

Technical Summary

Product Code	PLX16-SCT
Input Voltage Supply	220-240Vac 50/60Hz
Inrush Current (peak/duration) (A)	2.18A/135uS
Default Power	16 W
Power Factor	0.95
Settable Colour Temperatures	3000K, 4000K, 5000K
SDCM of CCT	<6
CRI	82
Dimmable	Y
Flicker	<1%
Lumens Output Maximum	1,600 lm
Maximum Efficiency	100 lm/W
L70B50 Lifetime (h) @Ta 25 °C	85,000 h
L80B10 Lifetime (h) @Ta 25 °C	54,000 h
L90B10 Lifetime (h) @Ta 25 °C	26,000 h
Nominal Lifetime (h)	50,000 h
Glow wire temperature(°C)	650
Blue Light Hazard	RG1
Weight	0.905Kg
Dimensions (L x W x D) (mm)	360x90x38.5
Beam Angle - Lumi (°)	40
LS Energy Efficiency Class	E

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Kosnic Lighting KosnicUK

KosnicLightingUK

7 7 Years
Product Warranty
UK Only

2 2 Years
On-Site Warranty
Main-land UK Only

Pollux




07919 PLX16-SCT

Overview

The Pollux slim profile LED wall light offers a low maintenance solution to lighting for all areas, with switchable CCT to meet your different ambient needs.

Power (W)	CCT (K)	Lumen (lm)
16	3000	1540
16	4000	1600
16	5000	1600

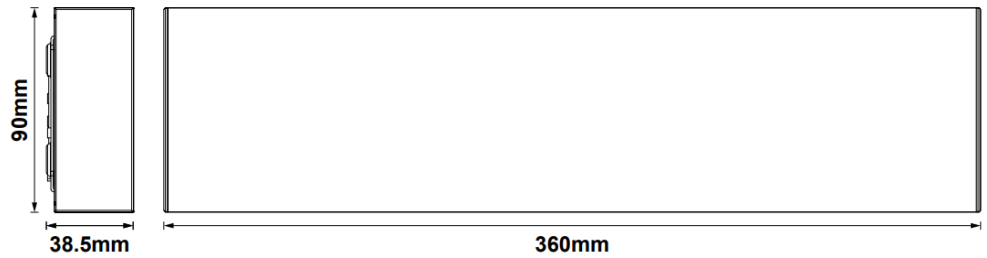

PLX16-SCT



IP20



General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK03
IP Rating	IP20
Nominal Lifetime (h)	50,000 h
Protection Rating	Class I
Installation Area	Internal and External

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Kosnic Lighting KosnicUK KosnicLightingUK KosnicUK