

5 5 Years
Product Warranty
UK Only

2 2 Years
On-Site Warranty
Main-land UK Only

Ossa Go

07927 OSSG15-W40

Ossa Go slim IP65 bulkhead 15W 4000K

- Choice of alternative decorative trims
- Integrated LED tray
- IP65 & vandal resistant (IK10)
- Microwave sensor version available
- 20mm conduit entry
- BESA box fitting points
- Flicker free



Overview

The Ossa Go is a slim bulkhead with integrated LED tray offering a low maintenance solution to lighting for all areas. With 20mm Conduit entry and BESA box fitting points to ease installation and maintenance.



General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK10
IP Rating	IP65
Nominal Lifetime (h)	50,000 h
Protection Rating	Class II
Installation Area	Internal and External

Technical Summary

Product Code	OSSG15-W40
Input Voltage Supply	220-240Vac 50/60Hz
Inrush Current (peak/duration) (A)	5 A / 100 us
Default Power	15 W
Power Factor	0.80
Default CCT	4,000 K
SDCM of CCT	<6
CRI	82
Flicker	<1%
Lumens Output Maximum	1,250 lm
Maximum Efficiency	84 lm/W
Maintained Luminous Flux	110 lm
L70B50 Lifetime (h) @Ta 25 °C	152,000 h
L80B10 Lifetime (h) @Ta 25 °C	96,000 h
L90B10 Lifetime (h) @Ta 25 °C	46,000 h
Nominal Lifetime (h)	50,000 h
Glow wire temperature(°C)	650
Blue Light Hazard	RG1
Weight	0.9Kg
Dimensions (L x W x D) (mm)	78xØ304
BESA Entry	True
Conduit Entry 20mm	Yes

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



5 5 Years
Product Warranty
UK Only

2 2 Years
On-Site Warranty
Main-land UK Only

Ossa Go



07927 OSSG15-W40

Optional Gear

Product Code	Description	Type
EMDD02	2W standard emergency module for LED DD and bulkhead	Emergency Module
EMDD02/ST	2W self-test emergency module for LED DD and bulkhead	Self-test Emergency Module

Accessories

Product Code	Description	Type
KPT-SCREW1	Anti-vandal Screw Pack	Screw
KPT-SCREWDRIVER1	Anti-vandal Screw Driver	Tool
OSSP-CHM	Ossa II and Ossa Go Clip-on ring Polo, Chrome, ø304mm	Trim
OSSP-BAS	Ossa II and Ossa Go Clip-on ring Polo, Brass, ø304mm	Trim
OSST-BLK	Ossa, Ossa II and Ossa Go Clip-on ring Edge, Matt Black, ø292mm	Trim
OSST-GRY	Ossa, Ossa II and Ossa Go, Clip-on ring Edge, Grey, ø292mm	Trim
OSST-WHT	Ossa II and Ossa Go Clip-on ring Edge, White, ø292mm	Trim
OSSLID-BLK	Ossa II and Ossa Go, Clip-on ring Eyelid, Black, ø292mm	Trim
OSSLID-GRY	Ossa II and Ossa Go, Clip-on ring Eyelid, Grey, ø292mm	Trim
OSSLID-WHT	Ossa II and Ossa Go, Clip-on ring Eyelid, White, ø292mm	Trim
OSSLT-CHM	Ossa, Ossa II and Ossa Go, Clip-on ring Deco back light filter, Chrome, ø379mm	Trim
OSSLT-BAS	Ossa, Ossa II and Ossa Go Clip-on ring Deco back light filter, Brass, ø379mm	Trim
OSSLT-PBL	Ossa, Ossa II and Ossa Go Clip-on ring Deco back light filter, Polished Black, ø379mm	Trim
OSSLT-WHT	Ossa, Ossa II and Ossa Go Clip-on ring Deco back light filter, White, ø379mm	Trim
OSSLT-SCH	Ossa, Ossa II and Ossa Go Clip-on ring Deco back light filter, Satin Chrome, ø379mm	Trim

Overview

The Ossa Go is a slim bulkhead with integrated LED tray offering a low maintenance solution to lighting for all areas. With 20mm Conduit entry and BESA box fitting points to ease installation and maintenance.



General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK10
IP Rating	IP65
Nominal Lifetime (h)	50,000 h
Protection Rating	Class II
Installation Area	Internal and External

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Kosnic Lighting KosnicUK KosnicLightingUK KosnicUK


5 5 Years
Product Warranty
UK Only

2 2 Years
On-Site Warranty
Main-land UK Only

Ossa Go



07927 OSSG15-W40

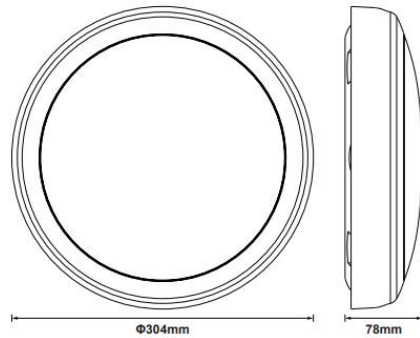

Overview

The Ossa Go is a slim bulkhead with integrated LED tray offering a low maintenance solution to lighting for all areas. With 20mm Conduit entry and BESA box fitting points to ease installation and maintenance.



General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK10
IP Rating	IP65
Nominal Lifetime (h)	50,000 h
Protection Rating	Class II
Installation Area	Internal and External

Order Code	OSSP-CHM	OSSP-BAS	OSST-BLK	OSST-GRY	OSST-WHT
Finish	Chrome	Brass	Matt Black	Grey	White
LOR (with trim)	65 %	65 %	62 %	65 %	65 %
Diameter	304 mm	304 mm	292 mm	292 mm	292 mm
Depth	70 mm	70 mm	70 mm	70 mm	70 mm

Order Code	OSSLID-BLK	OSSLID-GRY	OSSLID-WHT	OSSLT-WHT
Finish	Matt Black	Grey	White	White
LOR (with trim)	38 %	40 %	40 %	65 %
Diameter	292 mm	292 mm	292 mm	379 mm
Depth	64 mm	64 mm	64 mm	70 mm

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Kosnic Lighting KosnicUK KosnicLightingUK KosnicUK