

**4** Years  
Product Warranty  
UK Only

**2** Years  
On-Site Warranty  
Main-land UK Only

**Kosnic** 

# UEM Pro

07958 UEM04/ST

## Universal Emergency Module Pro 4W Self Test

- Standard/Self-test
- Built-in cable clamp, push to release
- Built-in loop-in loop-out terminals for 2 x 3-core cables
- Loop-in and loop-out push-wire terminals
- Built-in self-test function according to BS-EN-62034-2012
- Designed for use with all LED luminaires (class III) with external driver
- Easy Plug & Play installation
- For maintained or non-maintained emergency lighting systems
- Internal Li-ion battery with improved lifespan
- Easy battery replacement

### Overview

The Universal Emergency Module (UEM) with available Automatic Self-Test (AST) version is suitable for class III luminaires with integrated LEDs and separate LED drivers.

Provides an operation time of three hours. The UEM can be installed within a luminaire or within the ceiling void.



### General Information

IP Rating	IP20
Installation Area	Internal
UEM/EME Protection	Class II



Technical Summary	
Product Code	UEM04/ST
Dimensions (L x W x D) (mm)	211x91x32
UEM/EME Battery Life	4 y
UEM/EME Input Voltage	220-240Vac 50/60Hz
UEM/EME Ambient Temperature Range	0°C to 45°C
Emergency Modes	Maintained or Non-maintained
UEM/EME Test Function	Automatic Self-Test with Manual Test Button
UEM/EME Protection	Class II
UEM/EME Weight	0.37 kg
UEM/EME Battery Output Wattage (max)	4 W
UEM/EME Dimensions (L x W x D) (mm)	211x91x32
UEM/EME Emergency Operation Test	Automatic and Manual

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



**4** **4 Years**  
Product Warranty  
UK Only

**2** **2 Years**  
On-Site Warranty  
Main-land UK Only

**Kosnic** 

# UEM Pro

07958 UEM04/ST

## Accessories

Product Code	Description	Type
BAT26LI2	Li-ion Battery Pack 2600mAh for UEM04/DA	Battery


## Overview

The Universal Emergency Module (UEM) with available Automatic Self-Test (AST) version is suitable for class III luminaires with integrated LEDs and separate LED drivers. Provides an operation time of three hours. The UEM can be installed within a luminaire or within the ceiling void.




## General Information

IP Rating	IP20
Installation Area	Internal
UEM/EME Protection	Class II

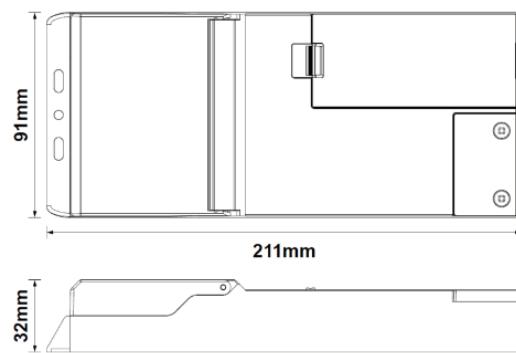

## Wiring Schematic

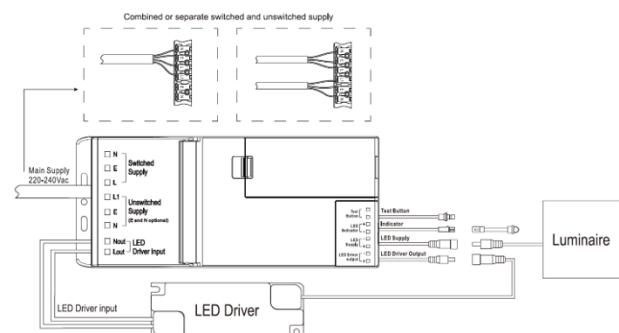

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

