

**5** 5 Years  
Product Warranty  
UK Only

**2** 2 Years  
On-Site Warranty  
Main-land UK Only

# Nitro Self-Test

08221 NTR03/ST

## Nitro Emergency Downlight 3W Self-test White

- Self-test function conforming to EN 62034
- Built-in LED status indicator
- Non-Maintained Downlight, >3hrs



### Overview

The Nitro LED Non-Maintained Emergency Downlights are discrete recessed fittings that provide emergency lighting only. Options of a standard lens design with a circular light pattern or a corridor version lens with a beam that is designed to emphasis illumination along one axis more than the other. Self-test version available.



### General Information

IP Rating	IP20
Protection Rating	Class II
Installation Area	Internal
UEM/EME Protection	Class II

### Compliance

LVD	EN 60598-1:2024, EN 60598-2-22:2022, EN 60669-1:2018, EN 61347-2-7:2012+A1:2021, EN 61347-2-13:2014+A1:2017, EN 62031:2020, EN 62493:2015+A1:2022
EMC	EN 55015:2019+A11:2020, EN 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN 61547:2023
Others	UKCA, CE, RoHS, WEEE, REACH

### Technical Summary

Product Code	NTR03/ST
Lumens Output Maximum	150 lm
Maximum Efficiency	125 lm/W
Emergency Luminous Flux	150 lm
Maintained Luminous Flux	150 lm
Weight	0.10Kg
Dimensions (L x W x D) (mm)	33xØ70
Cut-Out (mm)	Ø58mm
UEM/EME Battery Life	4 y
UEM/EME Input Voltage	220-240Vac 50/60Hz
UEM/EME Ambient Temperature Range	0°C to 45°C
UEM/EME Power Factor	0.4
Emergency Modes	Non-maintained Only
UEM/EME Test Function	Automatic Self-Test with Manual Test Button
UEM/EME CCT	6,000 K
UEM/EME Input Power (Max)	3 W
UEM/EME Protection	Class II
UEM/EME Dimensions (L x W x D) (mm)	28x70x58
UEM/EME Emergency Operation Test	Automatic and Manual
Beam Angle - Lumi (°)	45

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Kosnic Lighting KosnicUK KosnicLightingUK

**5** 5 Years  
Product Warranty  
UK Only

**2** 2 Years  
On-Site Warranty  
Main-land UK Only

# Nitro Self-Test



08221 NTR03/ST

## Accessories

Product Code	Description	Type
BAT26LI1	Li-ion Battery Pack, 2600mAh for DD EME modules & Self test modules, Niah	Battery



## Overview

The Nitro LED Non-Maintained Emergency Downlights are discrete recessed fittings that provide emergency lighting only. Options of a standard lens design with a circular light pattern or a corridor version lens with a beam that is designed to emphasis illumination along one axis more than the other. Self-test version available.



## General Information

IP Rating	IP20
Protection Rating	Class II
Installation Area	Internal
UEM/EME Protection	Class II

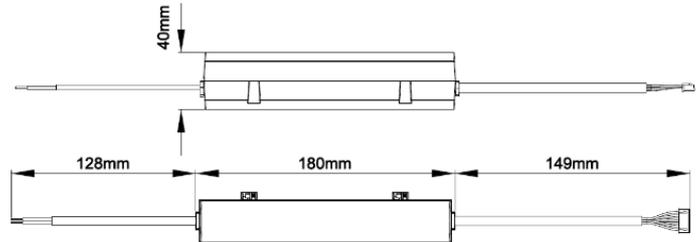

Tel: 01635 523 713

Email: [sales@kosnic.com](mailto:sales@kosnic.com)

[Kosnic.com](http://Kosnic.com)



Kosnic Lighting KosnicUK KosnicLightingUK KosnicUK