

**7** 7 Years  
Product Warranty  
UK Only

**2** 2 Years  
On-Site Warranty  
Main-land UK Only

Inda

Kosnic

08370 IND5F50/DV

## Inda slim backlight batten 5ft 28/50W CCT switch 1-10V Dim

- Switchable wattage and CCT switchable (3000K/4000K/5000K)
- Emergency options available
- Optional plug-in PIR ON/OFF sensor compatible with Uni-Remote
- DALI-2 DT 6, DSI, switchDIM, corridor FUNCTION V2 option available
- 228mm blank section with knock out sections to fit in motion sensor and EME downlight
- 1-10 (0-10V) dimming
- 20mm conduit entry
- Included 2.0m drop suspension kit

### Overview

The slim backlight Inda batten is CCT switchable and 1-10V/0-10V dimmable. With multiple wattage, DALI dimming, side mounted sensors and integrated emergency options. If you want to keep the slim design on show, multiple fittings can be joined with blank sections which can be fitting with sensors or emergency downlights.



IP20




### General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK04
IP Rating	IP20
Protection Rating	Class I
Installation Area	Internal
L80B10 Lifetime (h) @Ta 25 °C	60,000 h

### Compliance

LVD	EN 60598-1:2024, EN 60598-2-1:2021, EN 62031:2020, EN 62493:2015+A1:2022
EMC	EN 55015:2019+A11:2020, EN 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN 61547:2023
Others	UKCA, CE, RoHS, WEEE



### Technical Summary

Product Code	IND5F50/DV
Input Voltage Supply	220-240Vac 50/60Hz
Inrush Current (peak/duration) (A)	30A/130µs
Settable Wattages	28W, 50W
Driver Code/Part number	Boke BK-KHL050-1300Am
Settable Colour Temperatures	3000K, 4000K, 5000K
SDCM of CCT	<6
CRI	≥82
Dimmable	Y
Flicker	<1%
Lumens Output Maximum	5,700 lm
Maximum Efficiency	116 lm/W
L70B50 Lifetime (h) @ Ta 25 °C	60,000 h
L80B10 Lifetime (h) @ Ta 25 °C	60,000 h
L90B10 Lifetime (h) @ Ta 25 °C	48,000 h
Nominal Lifetime (h)	50,000 h
Glow wire temperature(°C)	650
Blue Light Hazard	RG1
Weight	5.9Kg
Dimensions (L x W x D) (mm)	1574x228x37
Conduit Entry 20mm	Yes

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Kosnic Lighting KosnicUK

KosnicLightingUK

**7** Years  
Product Warranty  
UK Only

**2** Years  
On-Site Warranty  
Main-land UK Only

Inda

Kosnic 

08370 IND5F50/DV

## Overview

The slim backlight Inda batten is CCT switchable and 1-10V/0-10V dimmable. With multiple wattage, DALI dimming, side mounted sensors and integrated emergency options. If you want to keep the slim design on show, multiple fittings can be joined with blank sections which can be fitting with sensors or emergency downlights.



IP20



## General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK04
IP Rating	IP20
Nominal Lifetime (h)	50,000 h
Protection Rating	Class I
Installation Area	Internal

## Optional Gear

Product Code	Description	Type
MWS-REC/DV	Recessed microwave Sensor, 1-10V dim output, remote required	Microwave Sensor
NTR03/ST	Nitro Emergency Downlight 3W Self-test White	Emergency Light
NTR03	Nitro Emergency Downlight 3W Manual test White	Emergency Light
MWS-SID/DV	M31 Side-Mount 1-10V microwave motion sensor MC054V RC	Microwave Sensor
MWS-SID	M30 Side-mount microwave motion ON/OFF sensor	Microwave Sensor
PIR-SID	P30 Exterior PIR Sensor Side-Mount with RMT-UNI control	PIR Sensor

## Accessories

Product Code	Description	Type
IND-BLANK	Inda interlock blank section 228mm	Connector kit
IND5F-BLANK	Blank section for 5ft Inda batten	

Settable (Default in Bold)		Variable					
CCT (K)	Rated Power (W)	Maximum Current Draw (mA)	Total Luminous Flux (lm)	Power Factor	LS Energy Consumption in on-mode (kWh/1000H)	LS Energy Efficiency Class	LS Useful Luminous Flux (lm)
3000	28	130	2950	0.94	27	D	4500
4000	28	130	3250	0.94	27	C	4800
5000	28	130	2950	0.94	27	D	4500
3000	50	224	5250	0.97	45	D	7200
<b>4000</b>	<b>50</b>	<b>224</b>	<b>5700</b>	<b>0.97</b>	<b>45</b>	<b>C</b>	<b>7800</b>
5000	50	224	5250	0.97	45	D	7200
CCT (K)	Rated Power (W)	LS On-Mode Power (Pon) (W)	LS Chromaticity Co-Ordinates (X)	LS Chromaticity Co-Ordinates (Y)	LS R9 CRI (LED/OLED)	Light Source Supply	
3000	28	27	0.433	0.4	5	36Vdc 750mA	
4000	28	27	0.383	0.372	10	36Vdc 750mA	
5000	28	27	0.342	0.349	5	36Vdc 750mA	
3000	50	45	0.433	0.4	5	36Vdc 1250mA	
<b>4000</b>	<b>50</b>	<b>45</b>	<b>0.383</b>	<b>0.372</b>	<b>10</b>	<b>36Vdc 1250mA</b>	
5000	50	45	0.342	0.349	5	36Vdc 1250mA	

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Kosnic Lighting KosnicUK KosnicLightingUK KosnicUK


**7** 7 Years  
Product Warranty  
UK Only

**2** 2 Years  
On-Site Warranty  
Main-land UK Only

# Inda

**Kosnic** 

08370 IND5F50/DV

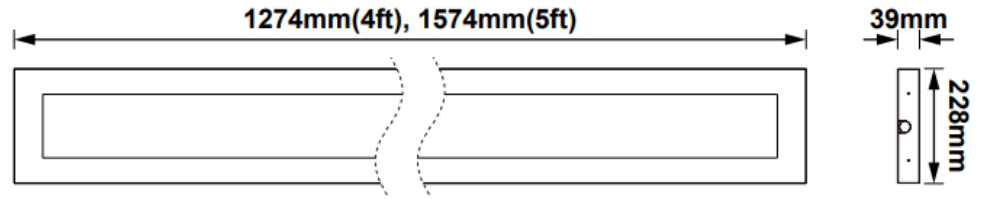

## Overview

The slim backlight Inda batten is CCT switchable and 1-10V/0-10V dimmable. With multiple wattage, DALI dimming, side mounted sensors and integrated emergency options. If you want to keep the slim design on show, multiple fittings can be joined with blank sections which can be fitting with sensors or emergency downlights.



**IP20**



## General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK04
IP Rating	IP20
Nominal Lifetime (h)	50,000 h
Protection Rating	Class I
Installation Area	Internal

Tel: 01635 523 713

Email: [sales@kosnic.com](mailto:sales@kosnic.com)

[Kosnic.com](http://Kosnic.com)



Kosnic Lighting KosnicUK KosnicLightingUK KosnicUK