


# T5 DALI

08734 T5DA5F-W40

## T5 DALI 5ft tube (must be ordered with DALI driver)

- High efficiency up to 172lm/W
- Designed to power only with Kosnic LED DALI Driver
- LED tube with 44Vdc input
- Easy replacement of fluorescent tube and ballast
- Save energy by up to 65%
- Long-life of 50,000h

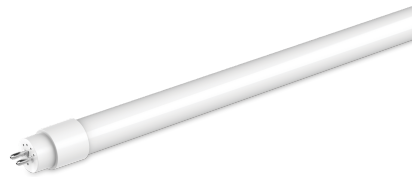

### Overview

The T5 DALI LED tubes takes a fresh approach to functional lighting with retrofit LED tubes that bring the energy saving capabilities of LED technology. They are suitable for all areas, including visually demanding non-transient task areas such as offices and educational premises requiring uniform lighting.

### General Information

Ambient Temperature Range (°C) -20°C to 50°C

Technical Summary	
Product Code	T5DA5F-W40
Input Voltage Supply	220-240Vac 50/60Hz
Settable Wattages	18W, 26W, 37W
Power Factor	0.9
Default CCT	4,000 K
CRI	>80
Dimmable	Y
Lumens Output Maximum	5,600 lm
Emergency Luminous Flux	354 lm
L70B50 Lifetime (h) @Ta 25 °C	50,000 h
Weight	0.15Kg
Dimensions (L x W x D) (mm)	1463xØ18
LS Energy Efficiency Class	D

### Compliance

LVD	EN 62493:2015+A1:2022, EN 62776:2015
EMC	EN 55015:2019+A11:2020, EN 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN 61547:2023
Others	UKCA, CE, RoHS, WEEE

Tel: 01635 523 713

Email: [sales@kosnic.com](mailto:sales@kosnic.com)

[Kosnic.com](http://Kosnic.com)



Kosnic Lighting KosnicUK KosnicLightingUK


# T5 DALI

08734 T5DA5F-W40

## Overview

The T5 DALI LED tubes takes a fresh approach to functional lighting with retrofit LED tubes that bring the energy saving capabilities of LED technology. They are suitable for all areas, including visually demanding non-transient task areas such as offices and educational premises requiring uniform lighting.

Rated Power (W)	Lumen (lm)
18	3100
26	4000
37	5600

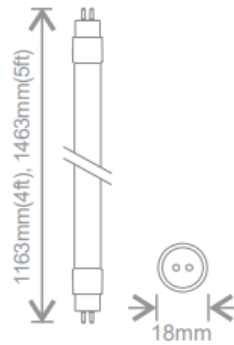

## General Information

Ambient Temperature Range (°C) -20°C to 50°C

### DALI driver (Must be ordered with T5 tube)

Order Code	Max Power	Output Current	Compatible Lamp
T5DA41S-DRV	41W	350mA	2 X 7W T5DA2F (in series) / 1 X 15W T5DA4F
		450mA	2 X 9.5W T5DA2F (in series) / 1 X 18W T5DA5F
		550mA	2 X 11.5W T5DA2F (in series)
		600mA	1 X 26W T5DA4F / 1 X 26W T5DA5F
		850mA	1 X 37W T5DA5F
T5DA58T-DRV	58W	350mA	2 X 15W T5DA4F
		450mA	2 X 18W T5DA5F
		600mA	2 X 26W T5DA4F / 2 X 26W T5DA5F

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

