

T8 CCT

08737 T8CCT17.5

T8 CCT 9W/17.5W Glass LED T8 tube 3000/4000/6500K

- High efficiency up to 150lm/W
- Save energy by up to 65%
- Switchable wattage and CCT (3000/4000/6500K)
- Flicker free

Overview

The T8 CCT is a highly energy efficient glass T8 tube that can help you save energy by up to 65%. And with its long life you can keep making savings for years to come. Plus, this version can completely adapt to your needs with its switchable wattage and CCT capabilities.



IP20

General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IP Rating	IP20
Protection Rating	Class II

Compliance

LVD	EN 62493:2015+A1:2022, EN 62776:2015
EMC	EN 55015:2019+A11:2020, EN 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN 61547:2023
Others	UKCA, CE, RoHS, WEEE

Technical Summary

Product Code	T8CCT17.5
Input Voltage Supply	220-240Vac 50/60Hz
Inrush Current (peak/duration) (A)	9A/170us
Settable Wattages	9W, 17.5W
Power Factor	0.5
Settable Colour Temperatures	3000K, 4000K, 6500K
SDCM of CCT	<6
CRI	82
Dimmable	N
Flicker	<10%
Lumens Output Maximum	2,450 lm
L70B50 Lifetime (h) @ Ta 25 °C	25,000 h
Nominal Lifetime (h)	25,000 h
Glow wire temperature(°C)	650
Blue Light Hazard	RG0
Weight	0.23Kg
Dimensions (L x W x D) (mm)	1214xØ28
Beam Angle - Lumi (°)	180
LS Energy Efficiency Class	D

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Kosnic Lighting KosnicUK KosnicLightingUK

T8 CCT

08737 T8CCT17.5

Overview

The T8 CCT is a highly energy efficient glass T8 tube that can help you save energy by up to 65%. And with its long life you can keep making savings for years to come. Plus, this version can completely adapt to your needs with its switchable wattage and CCT capabilities.


Rated Power (W)	Current (mA)	Lumen (lm)
9	77	1260
17.5	130	2450



IP20

General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IP Rating	IP20
Nominal Lifetime (h)	25,000 h
Protection Rating	Class II

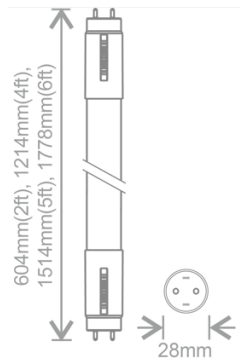

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

