5 Years
Product Warranty
UK Only

Mallar

Kosnic
LIGHTING • SIMPLY BETTER

08804 MAL-M/DV

Mallar Microwave Sensor, Recessed ON/OFF 1-10V dim output

- Suitable for basic on-off control or control of 1-10V dimmable luminaires
- Optional daylight harvesting
- Discreet flush mounting
- Optional stand-by dimming
- Minor motion sensitivity suitable for office and classroom applications
- Parameters settable by product switches or remote control
- Up to 800W inductive load capacity
- Push-fit terminals

Overview

The M11 Recessed Motion Sensor provides both ON/OFF and 1-10V control and can switch up to 1KW of resistive load. With settings for a test light, detection area, hold time, daylight sensing, stand-by period and standby dim level there is a setting for every need.



IP20

General Information

Ambient Temperature Range (°C)	-25°C to 55°C
IP Rating	IP20
Protection Rating	Class II
Installation Area	Internal

Technical Summary	
Product Code	MAL-M/DV
Weight	0.20Kg
Dimensions (L x W x D) (mm)	85x∅105
Cut-Out (mm)	75∅
Sensor Function	Daylight Sensor, Corridor, Daylight harvesting

Compliance

Others	UKCA, CE, RoHS, WEEE

Tel: 01635 523 713
Email: sales@kosnic.com
Kosnic.com
Kosnic Lighting KosnicUK KosnicLightingUK

5 Years
Product Warranty
UK Only

Mallar

Kosnic
LIGHTING • SIMPLY BETTER

08804 MAL-M/DV

Accessories

Product Code	Description	Type
MWS-RMT	Infrared remote control for microwave sensor, MH10 (for MWS-ZGA and Mallar)	Remote Control


Overview


The M11 Recessed Motion Sensor provides both ON/OFF and 1-10V control and can switch up to 1KW of resistive load. With settings for a test light, detection area, hold time, daylight sensing, stand-by period and standby dim level there is a setting for every need.

IP20

General Information

Ambient Temperature Range (°C)	-25°C to 55°C
IP Rating	IP20
Protection Rating	Class II
Installation Area	Internal

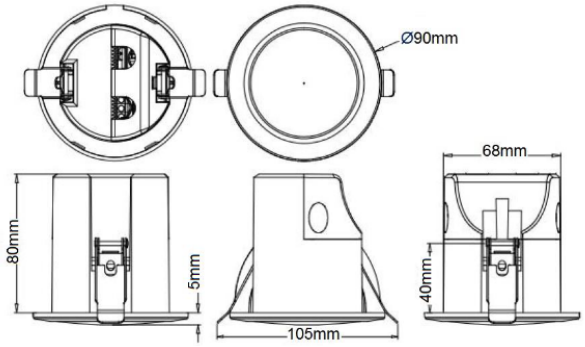

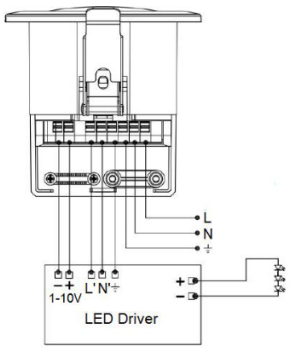


Tel: 01635 523 713
Email: sales@kosnic.com
Kosnic.com
Kosnic Lighting KosnicUK KosnicLightingUK KosnicUK

5 Years
Product Warranty
UK Only

Mallar

Kosnic
LIGHTING • SIMPLY BETTER

08804 MAL-M/DV



Detection area	Detection radius (at 6m and 3m height) Walking speed: 1m/s	
100%	3m	3m
75%	2m	2m
50%	1.5m	1.5m
25%	1m	1m

Overview

The M11 Recessed Motion Sensor provides both ON/OFF and 1-10V control and can switch up to 1KW of resistive load. With settings for a test light, detection area, hold time, daylight sensing, stand-by period and standby dim level there is a setting for every need.

IP20

General Information

Ambient Temperature Range (°C)	-25°C to 55°C
IP Rating	IP20
Protection Rating	Class II
Installation Area	Internal

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

Kosnic Lighting KosnicUK KosnicLightingUK KosnicUK