

08808 KAV-P-BLK

## Kavka Exterior IP54 on/off PIR 3 mount positions black

- Designed for wall, ceiling and corner mounting positions
- All mounting accessories are included
- IP54 rated for outdoor use
- Up to 4m mounting height
- Wide detection angle of 180° + 360° degree
- Adjustable time delay (10s-15min) and daylight sensitivity by dials
- Configure with Uni-Remote
- Available in black and white

### Overview

Kavka Exterior PIR Sensor is IP54 rated and designed for outdoor installation, with a range of mounting option and large detection area. The 360 degree downwards facing detector combined with the 12m range detector makes it well suited for installation above exterior doors.



### General Information

Ambient Temperature Range (°C)	-20°C to 40°C
IP Rating	IP54
Protection Rating	Class II
Installation Area	Internal and External

### Technical Summary

Product Code	KAV-P-BLK
Input Voltage Supply	220-240Vac 50/60Hz
Weight	0.175Kg
Dimensions (L x W x D) (mm)	114x78x78

### Compliance

LVD	EN 60669-1:2018, EN 60669-2-1:2004+A1:2009+A12:2010, EN 62493:2015+A1:2022
EMC	EN 55015:2019+A11:2020, EN 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN 61547:2023
Others	UKCA, CE, RoHS, WEEE, REACH

Tel: 01635 523 713

Email: [sales@kosnic.com](mailto:sales@kosnic.com)

[Kosnic.com](http://Kosnic.com)




08808 KAV-P-BLK

**Accessories**

Product Code	Description	Type
RMT-UNI	Universal Remote Control for Kosnic motion sensors	Remote Control

**Overview**

Kavka Exterior PIR Sensor is IP54 rated and designed for outdoor installation, with a range of mounting option and large detection area. The 360 degree downwards facing detector combined with the 12m range detector makes it well suited for installation above exterior doors.

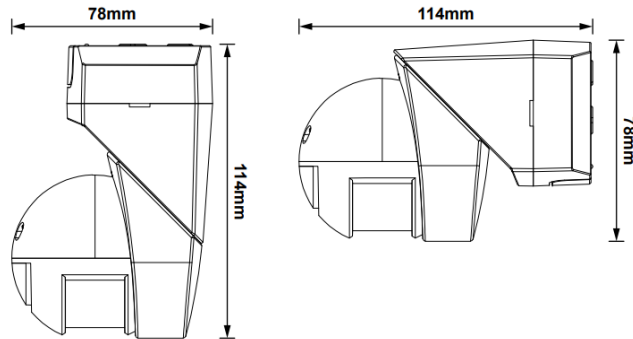


**General Information**


Ambient Temperature Range (°C)	-20°C to 40°C
IP Rating	IP54
Protection Rating	Class II
Installation Area	Internal and External

A1 - A2 Hold Time [MIN]	A3 - A4 Daylight Threshold [LUX]	A5 - A6 Stand-By Period [MIN]	A7 - A8 Stand-By Dim Level [%]	B1 - B2 Detection Area [%]	B3 - B4 CCT [K]	B5 - B6 Brightness [%]	B7 User Key	B8 Pair Key
Time stays ON after no motion detected	OFF when ambient light above threshold	Remains dimmed for this period if no motion detected & then turns off	Dimmed level in Stand-By	Sensor detection area/ sensitivity	Correlated colour Temperature	Adjust luminaire brightness	SECURITY SETTINGS	

Ceiling-mount (Bottom)

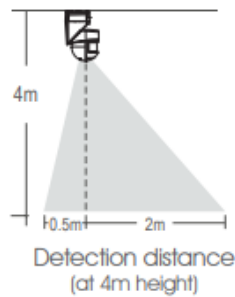

Ceiling-mount (Side)

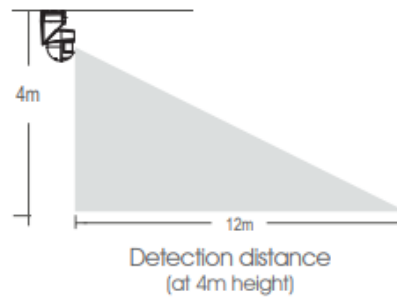

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com




08808 KAV-P-BLK


## Overview

Kavka Exterior PIR Sensor is IP54 rated and designed for outdoor installation, with a range of mounting option and large detection area. The 360 degree downwards facing detector combined with the 12m range detector makes it well suited for installation above exterior doors.

Wall-mount (Bottom)

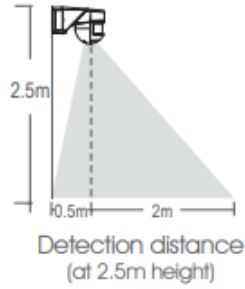

Wall-mount (Side)

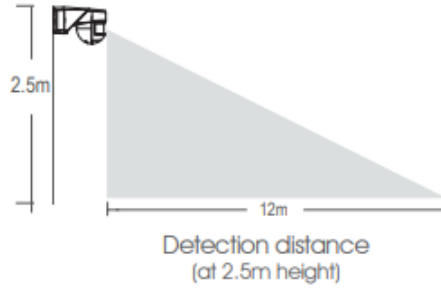

**IP54**



## General Information

Ambient Temperature Range (°C)	-20°C to 40°C
IP Rating	IP54
Protection Rating	Class II
Installation Area	Internal and External

Tel: 01635 523 713

Email: [sales@kosnic.com](mailto:sales@kosnic.com)

[Kosnic.com](http://Kosnic.com)

