3 Years
Product Warranty
UK Only

Kavka

Kosnic
LIGHTING • SIMPLY BETTER

08808 KAV-P-BLK

Kavka Exterior PIR Sensor ON/OFF IP54 3 mount positions Black

- Designed for wall, ceiling and corner mounting positions
- All mounting accessories are included
- IP54 rated for outdoor use
- Up to 4m mounting height
- Wide detection angle of 180°+360° degree
- Adjustable time delay (10s-15min) and daylight sensitivity by dials
- Configure with Uni-Remote
- Available in black and white





Overview

Kavka Exterior PIR Sensor is IP54 rated and designed for outdoor installation, with a range of mounting option and large detection area. The 360 degree downwards facing detector combined with the 12m range detector makes it well suited for installation above exterior doors.

IP54

General Information

Ambient Temperature Range (°C)	-20°C to 40°C
IP Rating	IP54
Protection Rating	Class II
Installation Area	Internal and External

Technical Summary	
Product Code	KAV-P-BLK
Weight	0.175Kg
Dimensions (L x W x D) (mm)	114x78x78
Sensor Function	Daylight Sensor, Dawn to Dusk

Compliance

LVD	EN 60669-1:2018, EN 60669-2-1:2004+A1:2009+A12:2010, EN 62493:2015+A1:2022
EMC	EN 55015:2019+A11:2020, EN 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN 61547:2023
Others	UKCA, CE, RoHS, WEEE, REACH

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

Kosnic Lighting KosnicUK KosnicLightingUK

3 Years
Product Warranty
UK Only

Kavka

Kosnic
LIGHTING • SIMPLY BETTER

08808 KAV-P-BLK

Accessories

Product Code	Description	Type
RMT-UNI	Universal Remote Control for Kosnic motion sensors	Remote Control


Overview

Kavka Exterior PIR Sensor is IP54 rated and designed for outdoor installation, with a range of mounting option and large detection area. The 360 degree downwards facing detector combined with the 12m range detector makes it well suited for installation above exterior doors.


IP54

General Information

Ambient Temperature Range (°C)	-20°C to 40°C
IP Rating	IP54
Protection Rating	Class II
Installation Area	Internal and External

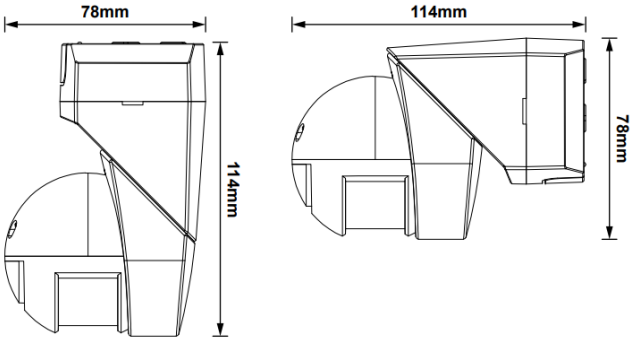

A1 - A2 Hold Time [MIN]	A3 - A4 Daylight Threshold [LUX]	A5 - A6 Stand-By Period [MIN]	A7 - A8 Stand- By Dim Level [%]	B1 - B2 Detection Area [%]	B3 - B4 CCT [K]	B5 - B6 Brightness [%]	B7 User Key	B8 Pair Key
Time stays ON after no motion detected	OFF when ambient light above threshold	Remains dimmed for this period if no motion detected & then turns off	Dimmed level in Stand-By	Sensor detection area/ sensitivity	Correlated colour Temperature	Adjust luminaire brightness	SECURITY SETTINGS	

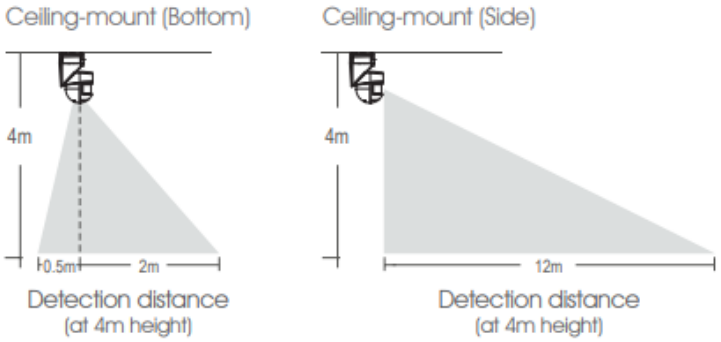

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com


Kosnic Lighting KosnicUK KosnicLightingUK KosnicUK

3 Years
Product Warranty
UK Only

Kavka

Kosnic
LIGHTING • SIMPLY BETTER

08808 KAV-P-BLK

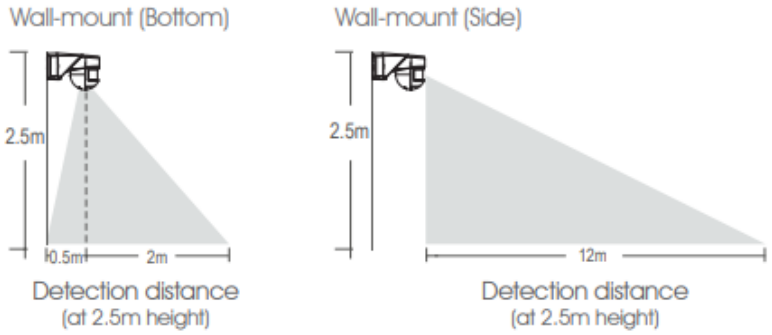

Overview

Kavka Exterior PIR Sensor is IP54 rated and designed for outdoor installation, with a range of mounting option and large detection area. The 360 degree downwards facing detector combined with the 12m range detector makes it well suited for installation above exterior doors.

IP54

General Information

Ambient Temperature Range (°C)	-20°C to 40°C
IP Rating	IP54
Protection Rating	Class II
Installation Area	Internal and External

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

Kosnic Lighting KosnicUK KosnicLightingUK KosnicUK