3 Years
Product Warranty
UK Only


Toco P30

Kosnic
LIGHTING • SIMPLY BETTER

08811 TOC-P

Toco P30 Exterior PIR Sensor Side-Mount with RMT-UNI control

- Automatic switching based on presence and ambient light sensing
- PIR & Light Sensor are configured with Uni-Remote
- Easy to install on Kosnic LED battens and non-corrosive
- For installing at M20 conduit entry
- IP65

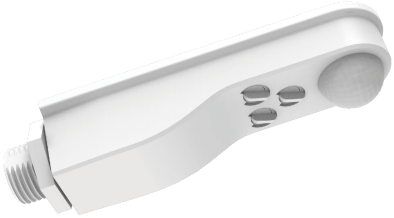



Overview

This side‐mounted PIR sensor is designed for fitting into a luminaire's compatible M20 conduit entry. It provides automatic light switching triggered by movement and ambient light levels, with adjustable detection sensitivity and a user‐selectable hold‐on time once motion ceases.

IP65

General Information

Ambient Temperature Range (°C)	-20°C to 40°C
IP Rating	IP65
Protection Rating	Class II
Installation Area	Internal and External

Compliance

Others	UKCA, CE, RoHS, WEEE

Technical Summary	
Product Code	TOC-P
Weight	0.09Kg
Dimensions (L x W x D) (mm)	138x33x30
Sensor Function	Daylight Sensor, Dawn to Dusk

Tel: 01635 523 713
Email: sales@kosnic.com
Kosnic.com
Kosnic Lighting KosnicUK KosnicLightingUK

3 Years
Product Warranty
UK Only

Toco P30

Kosnic
LIGHTING • SIMPLY BETTER

08811 TOC-P

Accessories

Product Code	Description	Type
RMT-UNI	Universal Remote Control for Kosnic motion sensors	Remote Control


Overview


This side-mounted PIR sensor is designed for fitting into a luminaire's compatible M20 conduit entry. It provides automatic light switching triggered by movement and ambient light levels, with adjustable detection sensitivity and a user-selectable hold-on time once motion ceases.

IP65


General Information

Ambient Temperature Range (°C)	-20°C to 40°C
IP Rating	IP65
Protection Rating	Class II
Installation Area	Internal and External

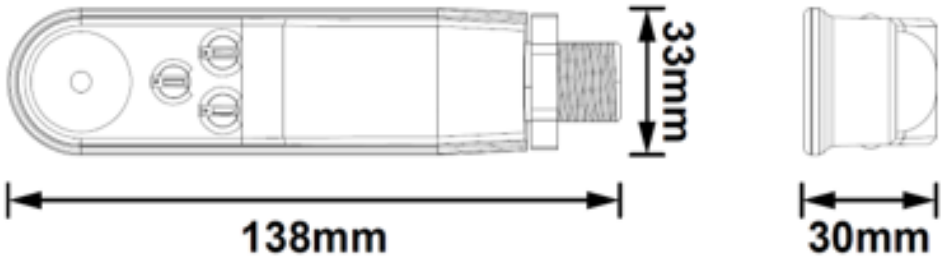



Wiring

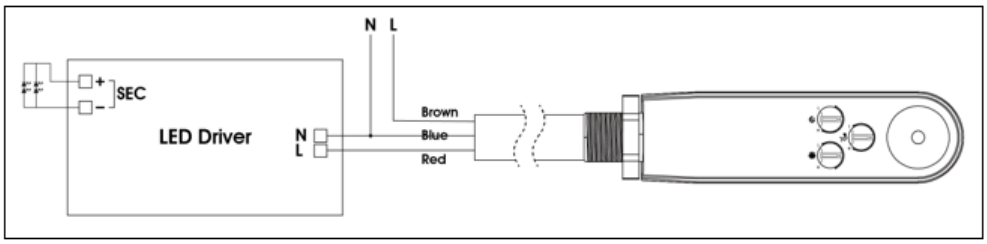

The sensor is allowed to be connected to one load only. The sensor may be damaged if connecting more than one load.

Tel: 01635 523 713
Email: sales@kosnic.com
Kosnic.com
Kosnic Lighting KosnicUK KosnicLightingUK KosnicUK

3 Years
Product Warranty
UK Only

Toco P30

Kosnic
LIGHTING • SIMPLY BETTER

08811 TOC-P

Overview

This side-mounted PIR sensor is designed for fitting into a luminaire's compatible M20 conduit entry. It provides automatic light switching triggered by movement and ambient light levels, with adjustable detection sensitivity and a user-selectable hold-on time once motion ceases.

Dials Setting



Manual Override (ON)

Switching the sensor OFF/ON/OFF/ON within 10s. After a period of 8 hours, the sensor and luminaire will return to automatic operation. Powering off the sensor, will return the sensor to automatic operation.

IP65

General Information

Ambient Temperature Range (°C)	-20°C to 40°C
IP Rating	IP65
Protection Rating	Class II
Installation Area	Internal and External

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

Kosnic Lighting KosnicUK KosnicLightingUK KosnicUK