

Toco P30

08811 TOC-P

Toco P30 Exterior PIR Sensor Side-Mount with RMT-UNI control

- Automatic switching based on presence and ambient light sensing
- PIR & Light Sensor are configured with Remote Control
- Easy to install on Kosnic LED battens and non-corrosive
- For installing at M20 conduit entry
- IP65



Overview

The Kosnic PIR Sensor is a simple energy-saving solution that uses light only when and where you need it. The sensor has an adjustable sensitivity setting for use in that will detect motion and stay illuminated for the duration of the hold time after motion ends.



General Information

Ambient Temperature Range (°C)	-20°C to 40°C
IP Rating	IP65
Protection Rating	Class II
Installation Area	Internal

Technical Summary

Product Code	TOC-P
Input Voltage Supply	220-240Vac 50/60Hz
Weight	0.09Kg
Dimensions (L x W x D) (mm)	138x33x30

Compliance

Others	UKCA, CE, RoHS, WEEE
--------	----------------------

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Toco P30

08811 TOC-P

Accessories

Product Code	Description	Type
RMT-UNI	Universal Remote Control for Kosnic motion sensors	Remote Control


Overview

The Kosnic PIR Sensor is a simple energy-saving solution that uses light only when and where you need it. The sensor has an adjustable sensitivity setting for use in that will detect motion and stay illuminated for the duration of the hold time after motion ends.




General Information


Ambient Temperature Range (°C)	-20°C to 40°C
IP Rating	IP65
Protection Rating	Class II
Installation Area	Internal

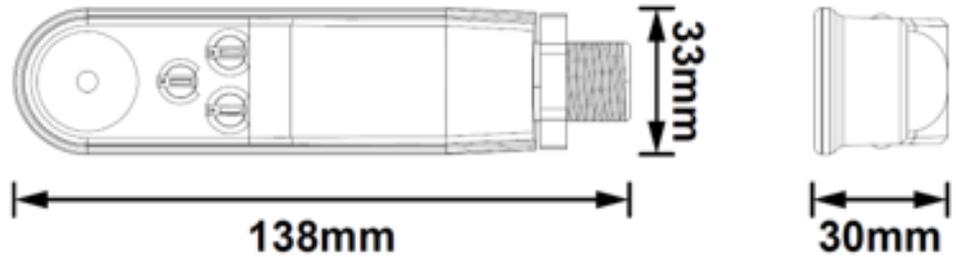

Detection Range



Wiring

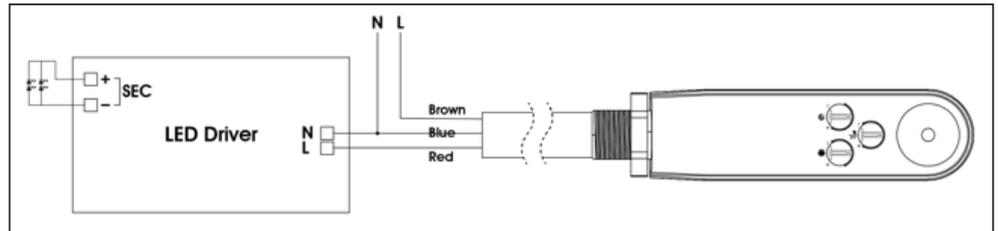

The sensor is allowed to be connected to one load only. The sensor may be damaged if connecting more than one load.

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Toco P30

08811 TOC-P

Dials Setting



Manual Override (ON)

Switching the sensor OFF/ON/OFF/ON within 10s. After a period of 8 hours, the sensor and luminaire will return to automatic operation. Powering off the sensor, will return the sensor to automatic operation.

Overview

The Kosnic PIR Sensor is a simple energy-saving solution that uses light only when and where you need it. The sensor has an adjustable sensitivity setting for use in that will detect motion and stay illuminated for the duration of the hold time after motion ends.



IP65



General Information

Ambient Temperature Range (°C) -20°C to 40°C

IP Rating IP65

Protection Rating Class II

Installation Area Internal

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

