

7 7 Years
Product Warranty
UK Only

2 2 Years
On-Site Warranty
Main-land UK Only

Kosnic

Nitro 2 in 1

08821 NTR03/SST

Nitro Duo Emergency Downlight 2.5W Manual&Self-test White

- Select manual or self-test mode via the internal dual-mode DIP switch
- Automatic Self-test conforming to BS-EN-62034
- To adjust green LED indicator brightness, press and hold the test button for more than 2 seconds
- Non-maintained Downlight, 3hrs

Overview

The Nitro LED Non-Maintained Emergency Downlights are discrete recessed fittings that provide emergency lighting only. Options of a standard lens design with a circular light pattern or a corridor version lens with a beam that is designed to emphasis illumination along one axis more than the other. Self-test version available.



General Information

IP Rating	IP20
Protection	Class II
Rating	
Installation Area	Internal
UEM/EME Protection	Class II
L80B10 Lifetime (h) @Ta 25 °C	77,000 h

Compliance

LVD	EN 60598-1:2024, EN 60598-2-2:2012, EN 60598-2-22:2022, EN 61347-2-7:2012+A1:2021, EN 62031:2020, EN 62493:2015+A1:2022
EMC	EN 55015:2019+A11:2020, EN 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN 61547:2023
Others	UKCA, CE, RoHS, WEEE, REACH



Technical Summary

Product Code	NTR03/SST
Lumens Output Maximum	150 lm
Maximum Efficiency	125 lm/W
Emergency Luminous Flux	150 lm
L80B10 Lifetime (h) @Ta 25 °C	77,000 h
Weight	0.10Kg
Dimensions (L x W x D) (mm)	34xØ70
Cut-Out (mm)	Ø58mm
UEM/EME Battery Life	7 y
UEM/EME Input Voltage	220-240Vac 50/60Hz
UEM/EME Ambient Temperature Range	0°C to 50°C
UEM/EME Power Factor	0.4
Emergency Modes	Maintained or Non-maintained
UEM/EME CCT	6,000 K
UEM/EME Input Power (Max)	2.5 W
UEM/EME Protection	Class II
UEM/EME Dimensions (L x W x D) (mm)	34xØ70
UEM/EME Emergency Operation Test	Automatic and Manual
Beam Angle - Lumi (°)	45

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Kosnic Lighting KosnicUK KosnicLightingUK

7 7 Years
Product Warranty
UK Only

2 2 Years
On-Site Warranty
Main-land UK Only



Nitro 2 in 1

08821 NTR03/SST

Accessories

Product Code	Description
BATS18LFP1	Battery for DD EME 2, Doxa 2 & EME light 2 in 1, Temp sensor





Overview

The Nitro LED Non-Maintained Emergency Downlights are discrete recessed fittings that provide emergency lighting only. Options of a standard lens design with a circular light pattern or a corridor version lens with a beam that is designed to emphasis illumination along one axis more than the other. Self-test version available.



General Information

IP Rating	IP20
Protection	Class II
Rating	
Installation Area	Internal
UEM/EME	Class II
Protection	

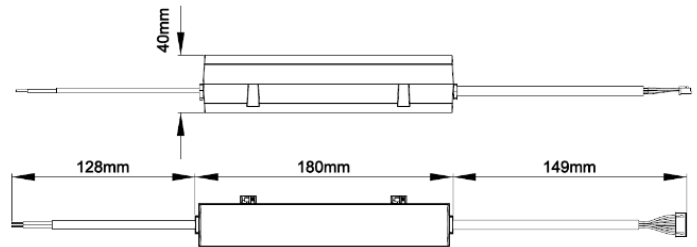

Healthy Statuses:

- — System Healthy
- * — 1/2 s — Duration Test Pending
- * — 1/4 s — Duration Test Running
- * — 1/8 s — Functional Test Running

Symbols explained: ● Continuous On * Flash — On ---- Off

Faults & Warning:

- — Battery Charging Fault / Not Connected
- * — 1/4 s — Battery Duration Fault
- * — 1/8 s — Lamp or Luminaire Fault
- * — 5 s — 1 s — Installation Fault Warning

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Kosnic Lighting KosnicUK KosnicLightingUK KosnicUK



7 7 Years
Product Warranty
UK Only

2 2 Years
On-Site Warranty
Main-land UK Only

Nitro 2 in 1

08821 NTR03/SST

Push switch

	FUNCTIONAL TEST
	DURATION TEST
	INDICATOR DIMMING

Overview

The Nitro LED Non-Maintained Emergency Downlights are discrete recessed fittings that provide emergency lighting only. Options of a standard lens design with a circular light pattern or a corridor version lens with a beam that is designed to emphasis illumination along one axis more than the other. Self-test version available.



IP20



General Information

IP Rating	IP20
Protection Rating	Class II
Installation Area	Internal
UEM/EME Protection	Class II

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

