5 Years
Product Warranty
UK Only

Della 2 Go

Kosnic
LIGHTING • SIMPLY BETTER

08851 DELG2100-W40

Della Go 2 100W Floodlight 4000K

- High efficiency up to 165lm/W
- Plug-in PIR sensor for 30W, 50W and 100W
- Diecast aluminium body
- Optional plug-in PIR ON/OFF sensor compatible with Uni-Remote
- Surge Protection
- 1m of H05RN-F 3 x 1.0mm² cable
- IP65 rated with PIR sensor

Overview

The Della Go LED floodlight offers a good lighting coverage for domestic and commercial outdoor lighting requirements. With varies wattage options available.



IP65

General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK08
IP Rating	IP65
Protection Rating	Class I
Installation Area	Internal and External
L80B10 Lifetime (h) @Ta 25 °C	77,000 h

Compliance

LVD	EN 60598-1:2024, EN 60598-2-5:2015
EMC	EN 55015:2019+A11:2020, EN 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN 61547:2023
Others	UKCA, CE, RoHS, WEEE

Technical Summary	
Product Code	DELG2100-W40
Input Voltage Supply	220-240Vac 50/60Hz
Inrush Current (peak/duration) (A)	72.3A/900µs
Default Power	100 W
Power Factor	0.97
Default CCT	4,000 K
SDCM of CCT	<3
CRI	82
Dimmable	N
Flicker	<1%
Lumens Output Maximum	16,000 lm
Maximum Efficiency	160 lm/W
L70B50 Lifetime (h) @Ta 25 °C	123,000 h
L80B10 Lifetime (h) @Ta 25 °C	77,000 h
L90B10 Lifetime (h) @Ta 25 °C	37,000 h
Nominal Lifetime (h)	50,000 h
Glow wire temperature(°C)	650
Blue Light Hazard	RG1
Weight	0.95Kg
Dimensions (L x W x D) (mm)	298x218x33
Beam Angle - Lumi (°)	90
LS Energy Efficiency Class	D

Tel: 01635 523 713
Email: sales@kosnic.com
Kosnic.com
Kosnic Lighting KosnicUK KosnicLightingUK

5 Years
Product Warranty
UK Only

Della 2 Go

Kosnic
LIGHTING • SIMPLY BETTER

08851 DELG2100-W40

Optional Gear

Product Code	Description	Type
DELG-PIR	Della Go PIR Sensor (requires Remote Control, order separately)	PIR Sensor

Accessories

Product Code	Description	Type
RMT-UNI	Universal Remote Control for Kosnic motion sensors	Remote Control
KCWP3IN	IP67 in-line connector	Connector kit


Overview

The Della Go LED floodlight offers a good lighting coverage for domestic and commercial outdoor lighting requirements. With varies wattage options available.

IP65

General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK08
IP Rating	IP65
Nominal Lifetime (h)	50,000 h
Protection Rating	Class I
Installation Area	Internal and External

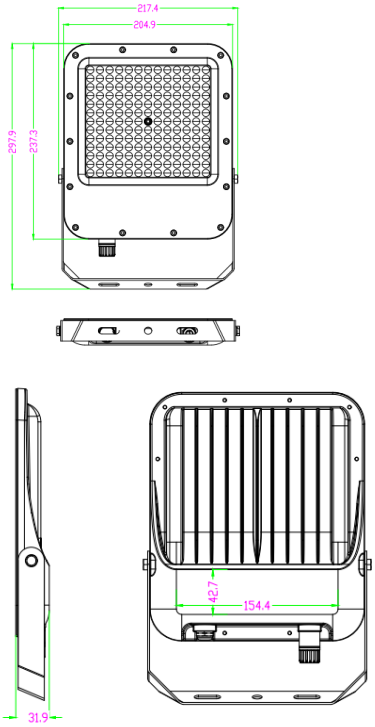

Tel: 01635 523 713
Email: sales@kosnic.com
Kosnic.com
Kosnic Lighting KosnicUK KosnicLightingUK KosnicUK