

**7** 7 Years  
Product Warranty  
UK Only

**2** 2 Years  
On-Site Warranty  
Main-land UK Only



# Etna Plus

08900 ETNP24LID-SCT

## Etna Plus 14W/17W/21W/24W Eyelid bulkhead CCT switchable

- Switchable wattage and CCT (3000/4000/5000K)
- Optional plug-in emergency modules, available in standard, self-test and DALI
- Optional plug-in microwave corridor sensor compatible with Uni-Remote
- Die-cast aluminium body
- 20mm Conduit entry
- BESA box fitting points
- IP65 and vandal resistant (IK10)
- Optional plug-in DALI conversion module

### Overview

The Etna Plus die-cast aluminium bulkhead is the perfect addition to exterior applications with its IP65 and IK10 rating. The luminaire can be customised by choosing your desired wattage and CCT settings, plus you can add in a wide range of our optional emergency modules and sensors.



IP65



### General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK10
IP Rating	IP65
Materials	Housing: Die-cast aluminium + PC
Protection Rating	Class I
Installation Area	Internal and External
L80B10 Lifetime (h) @Ta 25 °C	90,000 h

### Compliance

LVD	EN 60598-1:2024, EN 60598-2-1:2021, EN 61347-1:2015+A1:2021, EN 61347-11:2001+A1:2019, EN 61493:2015
EMC	EN 55015:2019+A11:2020, EN 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN 61547:2023
Others	UKCA, CE, RoHS, WEEE

### Technical Summary

Product Code	ETNP24LID-SCT
Input Voltage Supply	220-240Vac 50/60Hz
Inrush Current (peak/duration) (A)	40A/400us
Settable Wattages	14W, 17W, 21W, 24W
Driver Code/Part number	DR25C25-40 (MicroMile)
Driver Maximum Power (W)	25.2
Power Factor	0.93
Driver Power Factor	>0.9
Settable Colour Temperatures	3000K, 4000K, 5000K
SDCM of CCT	<6
CRI	82
Dimmable	N
Flicker	<1%
Lumens Output Maximum	1,580 lm
Emergency Luminous Flux	40 lm
L70B50 Lifetime (h) @Ta 25 °C	138,000 h
L80B10 Lifetime (h) @Ta 25 °C	90,000 h
L90B10 Lifetime (h) @Ta 25 °C	49,000 h
Nominal Lifetime (h)	50,000 h
Glow wire temperature(°C)	650
Blue Light Hazard	RG1
Weight	2.4Kg
Dimensions (L x W x D) (mm)	94xØ360
BESA Entry	True
Conduit Entry 20mm	Yes
Beam Angle - Lumi (°)	112
LS Energy Efficiency Class	C

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Kosnic Lighting KosnicUK KosnicLightingUK

**7** 7 Years  
Product Warranty  
UK Only

**2** 2 Years  
On-Site Warranty  
Main-land UK Only

# Etna Plus



08900 ETNP24LID-SCT

## Overview

The Etna Plus die-cast aluminium bulkhead is the perfect addition to exterior applications with its IP65 and IK10 rating. The luminaire can be customised by choosing your desired wattage and CCT settings, plus you can add in a wide range of our optional emergency modules and sensors.



**IP65**



## General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK10
IP Rating	IP65
Materials	Housing: Die-cast aluminium + PC
Nominal Lifetime (h)	50,000 h
Protection Rating	Class I
Installation Area	Internal and External

## Optional Gear

Product Code	Description	Type
EMDD202	DD EME 2 2W standard emergency module for LED DD and bulkhead	Emergency Module
EMDD202/SST	DD EME 2 Duo 2W emergency module for LED DD and bulkhead	Emergency Module
EMDD202/DA	DD EME 2 DALI-2 2W & Self-test emergency module	Emergency Module
LUL-M/D	Lulu Plug in microwave motion and daylight sensor 12V DC	Microwave Sensor

## Accessories

Product Code	Description	Type		
RMT-UNI	Universal Remote Control for Kosnic motion sensors	Remote Control		
Rated Power (W)	Current (mA)	CCT (K)	Power Factor	Lumen (lm)
14	70	3000 (Warm White)	0.9	790
14	70	4000 (Cool White)	0.9	920
14	70	5000 (Day Light)	0.9	840
17	80	3000 (Warm White)	0.93	960
17	80	4000 (Cool White)	0.93	1120
17	80	5000 (Day Light)	0.93	1020
21	90	3000 (Warm White)	0.93	1190
21	90	4000 (Cool White)	0.93	1380
21	90	5000 (Day Light)	0.93	1260
24	100	3000 (Warm White)	0.95	1360
24	100	4000 (Cool White)	0.95	1580
24	100	5000 (Day Light)	0.95	1440

Tel: 01635 523 713

Email: [sales@kosnic.com](mailto:sales@kosnic.com)

[Kosnic.com](http://Kosnic.com)




Kosnic Lighting KosnicUK KosnicLightingUK KosnicUK

**7** 7 Years  
Product Warranty  
UK Only

**2** 2 Years  
On-Site Warranty  
Main-land UK Only

# Etna Plus

08900 ETNP24LID-SCT

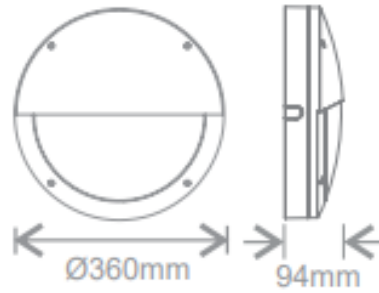

## Overview

The Etna Plus die-cast aluminium bulkhead is the perfect addition to exterior applications with its IP65 and IK10 rating. The luminaire can be customised by choosing your desired wattage and CCT settings, plus you can add in a wide range of our optional emergency modules and sensors.



**IP65**



## General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK10
IP Rating	IP65
Materials	Housing: Die-cast aluminium + PC
Nominal Lifetime (h)	50,000 h
Protection Rating	Class I
Installation Area	Internal and External

Tel: 01635 523 713

Email: [sales@kosnic.com](mailto:sales@kosnic.com)

[Kosnic.com](http://Kosnic.com)

