

5 5 Years
Product Warranty
UK Only

2 2 Years
On-Site Warranty
Main-land UK Only




Toba Air

08915 TOBA20-SCT

Toba Air 14W/17W/20W ultra-slim downlight 3000K/4000K/5000K

- High efficiency up to 130lm/W
- Optional add-on emergency kits, available in standard and self-test
- Switchable wattage and CCT (3000/4000/5000K)
- Surface or cut-out mounting options
- Ultra-slim profile of only 12mm
- Unique adjustable mounting bracket (cut-out range 80-205mm)



Overview

The Toba Air is the slimmest addition to the Toba range, with an incredibly low profile of just 12mm. It has almost unrivalled flexibility, it's CCT switchable, it has a range of wattage options, adjustable recess, and can be fitted with an emergency module. It will be difficult to find a fitting that can be used in more situations.



General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK03
IP Rating	IP65
Materials	Housing PC+PS
Protection Rating	Class II
Installation Area	Internal
L80B10 Lifetime (h) @Ta 25 °C	67,000 h

Compliance

LVD	EN 60598-1:2024, EN 60598-2-1:2021, EN 62471:2008, EN 62493:2015+A1:2022
EMC	EN 55015:2019+A11:2020, EN 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN 61547:2023
Others	UKCA, CE, RoHS, WEEE

Technical Summary

Product Code	TOBA20-SCT
Input Voltage Supply	220-240Vac 50/60Hz
Inrush Current (peak/duration) (A)	31A/129us
Settable Wattages	14W, 17W, 20W
Power Factor	0.95
Settable Colour Temperatures	3000K, 4000K, 5000K
SDCM of CCT	<6
CRI	82
Dimmable	N
Flicker	1%
Lumens Output Maximum	2,600 lm
Emergency Luminous Flux	350 lm
L70B50 Lifetime (h) @Ta 25 °C	106,000 h
L80B10 Lifetime (h) @Ta 25 °C	67,000 h
L90B10 Lifetime (h) @Ta 25 °C	32,000 h
Nominal Lifetime (h)	50,000 h
Glow wire temperature(°C)	650
Blue Light Hazard	RG1
Weight	0.65Kg
Dimensions (L x W x D) (mm)	12xØ250
Cut-Out (mm)	80-205
LS Energy Efficiency Class	D

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Kosnic Lighting KosnicUK KosnicLightingUK

5 5 Years
Product Warranty
UK Only

2 2 Years
On-Site Warranty
Main-land UK Only

Toba Air



08915 TOBA20-SCT

Overview

The Toba Air is the slimmest addition to the Toba range, with an incredibly low profile of just 12mm. It has almost unrivalled flexibility, it's CCT switchable, it has a range of wattage options, adjustable recess, and can be fitted with an emergency module. It will be difficult to find a fitting that can be used in more situations.




General Information

Ambient Temperature Range (°C)	-20°C to 50°C
IK Rating	IK03
IP Rating	IP65
Materials	Housing PC+PS
Nominal Lifetime (h)	50,000 h
Protection Rating	Class II
Installation Area	Internal

Optional Gear

Product Code	Description	Type
DRC26/CSB	Dimmable Driver: Casambi dimmable driver 26W Bluetooth & PUSH button	Dimmable Driver
DRC20/DA	Dimmable Driver: 20W DALI2 primary push dim driver	Dimmable Driver
DRC30/DA	Dimmable Driver: 30W DALI, 1-10V, Primary PUSH Driver	Dimmable Driver
UEM03	Universal Emergency Module 3W	Emergency Module
UEM03/SST	Universal Emergency Module Duo 3.5W Standard&Self-test	Emergency Module
EMPAD01	Neka Emergency Downlight kit 2.5W Manual test	Emergency Module
EMPAD01/SST	Neka Duo Emergency Downlight kit 2.5W Manual & Self-test	Emergency Kit

Rated Power (W)	Current (mA)	CCT (K)	Lumen (lm)
14	62	3000 (Warm White)	1680
14	62	4000 (Cool White)	1820
14	62	5000 (Day Light)	1820
17	74	3000 (Warm White)	2040
17	74	4000 (Cool White)	2210
17	74	5000 (Day Light)	2210
20	85	3000 (Warm White)	2400
20	85	4000 (Cool White)	2600
20	85	5000 (Day Light)	2600

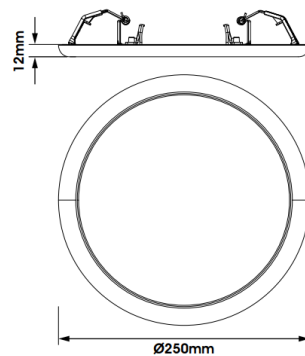

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Kosnic Lighting KosnicUK KosnicLightingUK KosnicUK